



## LMH6654/LMH6655

### Single/Dual Low Power, 250 MHz, Low Noise Amplifiers

#### General Description

The LMH6654/LMH6655 single and dual high speed, voltage feedback amplifiers are designed to have unity-gain stable operation with a bandwidth of 250 MHz. They operate from  $\pm 2.5V$  to  $\pm 6V$  and each channel consumes only 4.5 mA. The amplifiers feature very low voltage noise and wide output swing to maximize signal-to-noise ratio.

The LMH6654/LMH6655 have a true single supply capability with input common mode voltage range extending 150 mV below negative rail and within 1.3V of the positive rail.

LMH6654/LMH6655 high speed and low power combination make these products an ideal choice for many portable, high speed application where power is at a premium.

The LMH6654 is packaged in 5-Pin SOT-23 and 8-Pin SOIC. The LMH6655 is packaged in 8-Pin MSOP and 8-Pin SOIC.

The LMH6654/LMH6655 are built on National's Advance VIP10™ (Vertically Integrated PNP) complementary bipolar process.

#### Features



( $V_S = \pm 5V$ ,  $T_J = 25^\circ C$ , Typical values unless specified).

- Voltage feedback architecture
- Unity gain bandwidth 250 MHz
- Supply voltage range  $\pm 2.5V$  to  $\pm 6V$
- Slew rate 200 V/ $\mu$ sec
- Supply current 4.5 mA/channel
- Input common mode voltage  $-5.15V$  to  $+3.7V$
- Output voltage swing ( $R_L = 100\Omega$ )  $-3.6V$  to  $3.4V$
- Input voltage noise 4.5 nV/ $\sqrt{Hz}$
- Input current noise 1.7 pA/ $\sqrt{Hz}$
- Settling Time to 0.01% 25 ns

#### Applications

- ADC drivers
- Consumer video
- Active filters
- Pulse delay circuits
- xDSL receiver
- Pre-amps

#### Typical Performance Characteristics

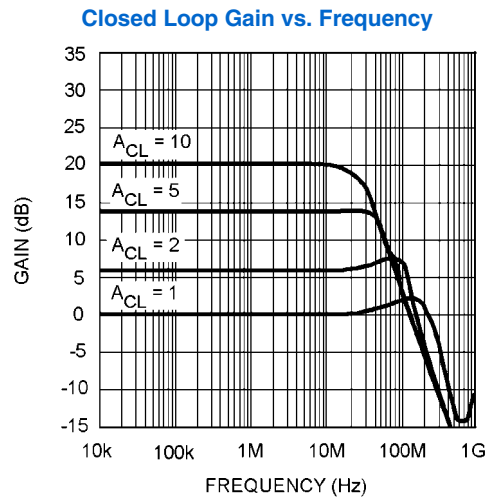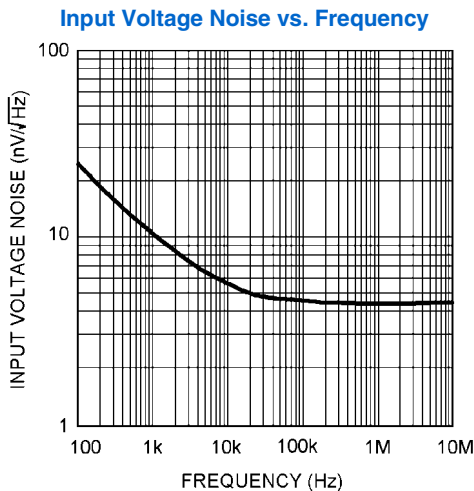

LMH6654/LMH6655 Single/Dual Low Power, 250 MHz, Low Noise Amplifiers

VIP10™ is a trademark of National Semiconductor Corporation.

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

ESD Tolerance (Note 2)	
Human Body Model	2 kV
Machine Model	200V
V <sub>IN</sub> Differential	±1.2V
Output Short Circuit Duration	(Note 3)
Supply Voltage (V <sup>+</sup> - V <sup>-</sup> )	13.2V
Voltage at Input pins	V <sup>+</sup> +0.5V, V <sup>-</sup> -0.5V
Storage Temperature Range	-65°C to +150°C

Junction Temperature (Note 4)	+150°C
Soldering Information	
Infrared or Convection (20 sec.)	235°C
Wave Soldering (10 sec.)	260°C

**Operating Ratings** (Note 1)

Supply Voltage (V <sup>+</sup> - V <sup>-</sup> )	±2.5V to ±6.0V
Junction Temperature Range	-40°C to +85°C
Thermal Resistance (θ <sub>JA</sub> )	
8-Pin SOIC	172°C/W
8-Pin MSOP	235°C/W
5-Pin SOT-23	265°C/W

**±5V Electrical Characteristics**

Unless otherwise specified, all limits guaranteed for T<sub>J</sub> = 25°C, V<sup>+</sup> = +5V, V<sup>-</sup> = -5V, V<sub>CM</sub> = 0V, A<sub>V</sub> = +1, R<sub>F</sub> = 25Ω for gain = +1, R<sub>F</sub> = 402Ω for gain = ≥ +2, and R<sub>L</sub> = 100Ω. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
<b>Dynamic Performance</b>						
f <sub>CL</sub>	Close Loop Bandwidth	A <sub>V</sub> = +1		250		MHz
		A <sub>V</sub> = +2		130		
		A <sub>V</sub> = +5		52		
		A <sub>V</sub> = +10		26		
GBWP	Gain Bandwidth Product	A <sub>V</sub> ≥ +5		260		MHz
	Bandwidth for 0.1 dB Flatness	A <sub>V</sub> +1		18		MHz
φ <sub>m</sub>	Phase Margin			50		deg
SR	Slew Rate (Note 8)	A <sub>V</sub> = +1, V <sub>IN</sub> = 2 V <sub>PP</sub>		200		V/μs
t <sub>S</sub>	Settling Time 0.01%	A <sub>V</sub> = +1, 2V Step		25		ns
				15		ns
t <sub>r</sub>	Rise Time	A <sub>V</sub> = +1, 0.2V Step		1.4		ns
t <sub>f</sub>	Fall Time	A <sub>V</sub> = +1, 0.2V Step		1.2		ns
<b>Distortion and Noise Response</b>						
e <sub>n</sub>	Input Referred Voltage Noise	f ≥ 0.1 MHz		4.5		nV/√Hz
i <sub>n</sub>	Input-Referred Current Noise	f ≥ 0.1 MHz		1.7		pA/√Hz
	Second Harmonic Distortion	A <sub>V</sub> = +1, f = 5 MHz		-80		dBc
	Third Harmonic Distortion	V <sub>O</sub> = 2 V <sub>PP</sub> , R <sub>L</sub> = 100Ω		-85		
X <sub>t</sub>	Crosstalk (for LMH6655 only)	Input Referred, 5 MHz, Channel-to-Channel		-80		dB
DG	Differential Gain	A <sub>V</sub> = +2, NTSC, R <sub>L</sub> = 150Ω		0.01		%
DP	Differential Phase	A <sub>V</sub> = +2, NTSC, R <sub>L</sub> = 150Ω		0.025		deg
<b>Input Characteristics</b>						
V <sub>OS</sub>	Input Offset Voltage	V <sub>CM</sub> = 0V	-3 -4	±1	3 4	mV
TC V <sub>OS</sub>	Input Offset Average Drift	V <sub>CM</sub> = 0V (Note 7)		6		μV/°C
I <sub>B</sub>	Input Bias Current	V <sub>CM</sub> = 0V		5	12 18	μA
I <sub>OS</sub>	Input Offset Current	V <sub>CM</sub> = 0V	-1 -2	0.3	1 2	μA
R <sub>IN</sub>	Input Resistance	Common Mode		4		MΩ
		Differential Mode		20		kΩ

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
C <sub>IN</sub>	Input Capacitance	Common Mode		1.8		pF
		Differential Mode		1		
CMRR	Common Mode Rejection Ratio	Input Referred, V <sub>CM</sub> = 0V to -5V	70 <b>68</b>	90		dB
CMVR	Input Common- Mode Voltage Range	CMRR ≥ 50 dB		-5.15	-5.0	V
			3.5	3.7		
<b>Transfer Characteristics</b>						
A <sub>VOL</sub>	Large Signal Voltage Gain	V <sub>O</sub> = 4 V <sub>PP</sub> , R <sub>L</sub> = 100Ω	60 <b>58</b>	67		dB
<b>Output Characteristics</b>						
V <sub>O</sub>	Output Swing High	No Load	3.4 <b>3.2</b>	3.6		V
	Output Swing Low	No Load		-3.9	-3.7 <b>-3.5</b>	
	Output Swing High	R <sub>L</sub> = 100Ω	3.2 <b>3.0</b>	3.4		
	Output Swing Low	R <sub>L</sub> = 100Ω		-3.6	-3.4 <b>-3.2</b>	
I <sub>SC</sub>	Short Circuit Current (Note 3)	Sourcing, V <sub>O</sub> = 0V ΔV <sub>IN</sub> = 200 mV	145 <b>130</b>	280		mA
		Sinking, V <sub>O</sub> = 0V ΔV <sub>IN</sub> = 200 mV	100 <b>80</b>	185		
I <sub>OUT</sub>	Output Current	Sourcing, V <sub>O</sub> = +3V		80		mA
		Sinking, V <sub>O</sub> = -3V		120		
R <sub>O</sub>	Output Resistance	A <sub>V</sub> = +1, f < 100 kHz		0.08		Ω
<b>Power Supply</b>						
PSRR	Power Supply Rejection Ratio	Input Referred, V <sub>S</sub> = ±5V to ±6V	60	76		dB
I <sub>S</sub>	Supply Current (per channel)			4.5	6 <b>7</b>	mA

## 5V Electrical Characteristics

Unless otherwise specified, all limits guaranteed for T<sub>J</sub> = 25°C, V<sub>+</sub> = +5V, V<sub>-</sub> = -0V, V<sub>CM</sub> = 2.5V, A<sub>V</sub> = +1, R<sub>F</sub> = 25Ω for gain = +1, R<sub>F</sub> = 402Ω for gain = ≥ +2, and R<sub>L</sub> = 100Ω to V<sub>+</sub>/2. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
<b>Dynamic Performance</b>						
f <sub>CL</sub>	Close Loop Bandwidth	A <sub>V</sub> = +1		230		MHz
		A <sub>V</sub> = +2		120		
		A <sub>V</sub> = +5		50		
		A <sub>V</sub> = +10		25		
GBWP	Gain Bandwidth Product	A <sub>V</sub> ≥ +5		250		MHz
	Bandwidth for 0.1 dB Flatness	A <sub>V</sub> = +1		17		MHz
φ <sub>m</sub>	Phase Margin			48		deg
SR	Slew Rate (Note 8)	A <sub>V</sub> = +1, V <sub>IN</sub> = 2 V <sub>PP</sub>		190		V/μs
t <sub>S</sub>	Settling Time	A <sub>V</sub> = +1, 2V Step		30		ns
			0.01%		20	
t <sub>r</sub>	Rise Time	A <sub>V</sub> = +1, 0.2V Step		1.5		ns
t <sub>f</sub>	Fall Time	A <sub>V</sub> = +1, 0.2V Step		1.35		ns

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
<b>Distortion and Noise Response</b>						
$e_n$	Input Referred Voltage Noise	$f \geq 0.1$ MHz		4.5		$nV/\sqrt{Hz}$
$i_n$	Input Referred Current Noise	$f \geq 0.1$ MHz		1.7		$pA/\sqrt{Hz}$
	Second Harmonic Distortion	$A_V = +1, f = 5$ MHz		-65		dBc
	Third Harmonic Distortion	$V_O = 2 V_{PP}, R_L = 100\Omega$		-70		
$X_t$	Crosstalk (for LMH6655 only)	Input Referred, 5 MHz		-78		dB
<b>Input Characteristics</b>						
$V_{OS}$	Input Offset Voltage	$V_{CM} = 2.5V$	-5 <b>-6.5</b>	$\pm 2$	5 <b>6.5</b>	mV
TC $V_{OS}$	Input Offset Average Drift	$V_{CM} = 2.5V$ (Note 7)		6		$\mu V/^\circ C$
$I_B$	Input Bias Current	$V_{CM} = 2.5V$		6	12 <b>18</b>	$\mu A$
$I_{OS}$	Input Offset Current	$V_{CM} = 2.5V$	-2 <b>-3</b>	0.5	2 <b>3</b>	$\mu A$
$R_{IN}$	Input Resistance	Common Mode		4		$M\Omega$
		Differential Mode		20		$k\Omega$
$C_{IN}$	Input Capacitance	Common Mode		1.8		$pF$
		Differential Mode		1		
CMRR	Common Mode Rejection Ratio	Input Referred, $V_{CM} = 0V$ to $-2.5V$	70 <b>68</b>	90		dB
CMVR	Input Common Mode Voltage Range	CMRR $\geq 50$ dB		-0.15	0	V
				3.5	3.7	
<b>Transfer Characteristics</b>						
$A_{VOL}$	Large Signal Voltage Gain	$V_O = 1.6 V_{PP}, R_L = 100\Omega$	58 <b>55</b>	64		dB
<b>Output Characteristics</b>						
$V_O$	Output Swing High	No Load	3.6 <b>3.4</b>	3.75		V
	Output Swing Low	No Load		0.9	1.1 <b>1.3</b>	
	Output Swing High	$R_L = 100\Omega$	3.5 <b>3.35</b>	3.70		
	Output Swing Low	$R_L = 100\Omega$		1	1.3 <b>1.45</b>	
$I_{SC}$	Short Circuit Current (Note 3)	Sourcing, $V_O = 2.5V$ $\Delta V_{IN} = 200$ mV	90 <b>80</b>	170		mA
		Sinking, $V_O = 2.5V$ $\Delta V_{IN} = 200$ mV	70 <b>60</b>	140		
$I_{OUT}$	Output Current	Sourcing, $V_O = +3.5V$		30		mA
		Sinking, $V_O = 1.5V$		60		
$R_O$	Output Resistance	$A_V = +1, f < 100$ kHz		.08		$\Omega$
<b>Power Supply</b>						
PSRR	Power Supply Rejection Ratio	Input Referred, $V_S = \pm 2.5V$ to $\pm 3V$	60	75		dB
$I_S$	Supply Current (per channel)			4.5	6 <b>7</b>	mA

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics Table.

**Note 2:** Human body model, 1.5 kΩ in series with 100 pF. Machine model: 0Ω in series with 100 pF.

**Note 3:** Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature at 150°C.

**Note 4:** The maximum power dissipation is a function of  $T_{J(MAX)}$ ,  $\theta_{JA}$  and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{J(MAX)} - T_A)/\theta_{JA}$ . All numbers apply for packages soldered directly onto a PC board.

**Note 5:** Typical Values represent the most likely parametric norm.


**Note 6:** All limits are guaranteed by testing or statistical analysis.

**Note 7:** Offset voltage average drift is determined by dividing the change in  $V_{OS}$  at temperature extremes into the total temperature change.


**Note 8:** Slew rate is the slower of the rising and falling slew rates. Slew rate is rate of change from 10% to 90% of output voltage step.

## Connection Diagrams


**8-Pin SOIC (LMH6654)**

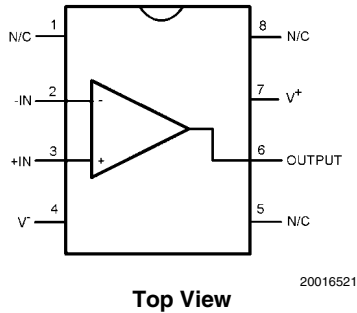

**5-Pin SOT-23 (LMH6654)**

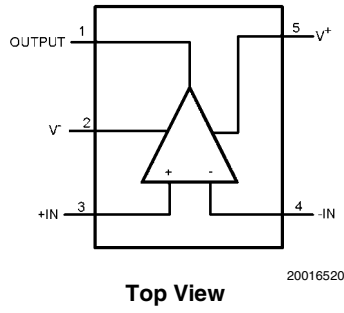

**8-Pin SOIC and MSOP (LMH6655)**

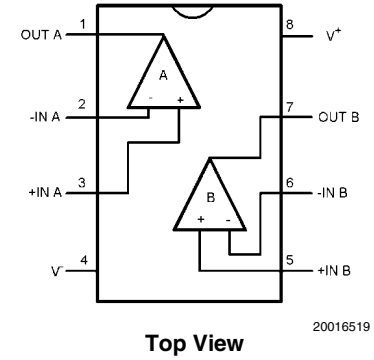


## Ordering Information

Package	Part Number	Package Marking	Transport Media	NSC Drawing
8-Pin SOIC	LMH6654MA	LMH6654MA	95 Units Rails	M08A
	LMH6654MAX		2.5k Units Tape and Reel	
	LMH6655MA	LMH6655MA	95 Units Rails	
	LMH6655MAX		2.5k Units Tape and Reel	
5-Pin SOT-23	<b>LMH6654MF</b>	A66A	1k Units Tape and Reel	MF05A
	LMH6654MFX		3K Units Tape and Reel	
8-Pin MSOP	LMH6655MM	A67A	1k Units Tape and Reel	MUA08A
	LMH6655MMX		3.5k Units Tape and Reel	


**Typical Performance Characteristics**  $T_J = 25^\circ\text{C}$ ,  $V^+ = \pm 5\text{V}$ ,  $V^- = -5$ ,  $R_F = 25\Omega$  for gain = +1,  $R_F = 402\Omega$  and for gain  $\geq +2$ , and  $R_L = 100\Omega$ , unless otherwise specified.

**Closed Loop Bandwidth (G = +1)**

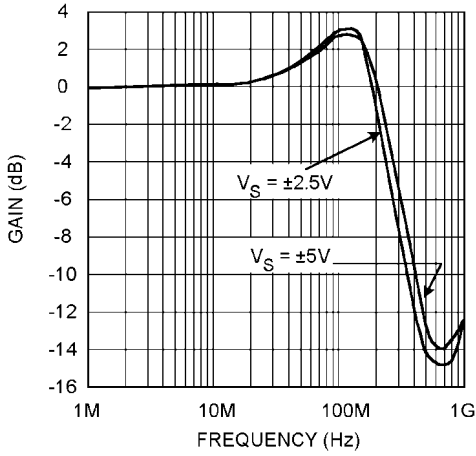


20016509

**Closed Loop Bandwidth (G = +2)**

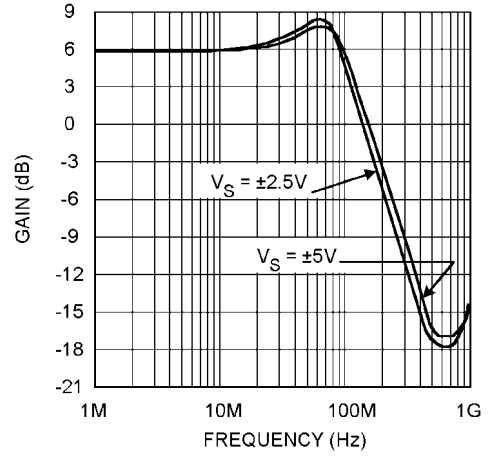


20016510

**Closed Loop Bandwidth (G = +5)**

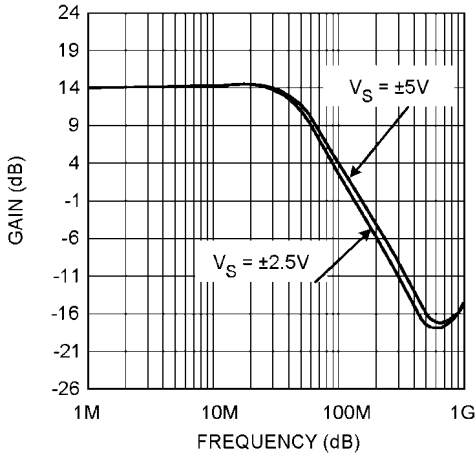


20016511

**Closed Loop Bandwidth (G = +10)**

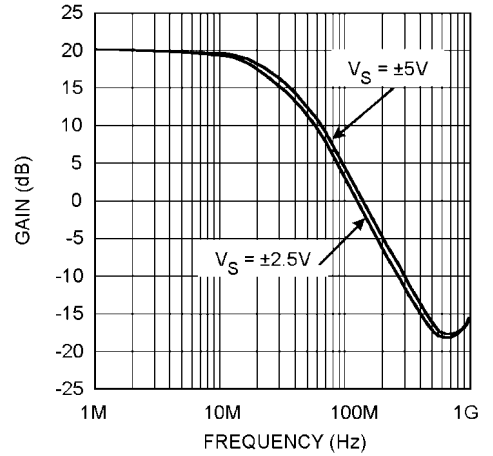


20016512

**Supply Current per Channel vs. Supply Voltage**

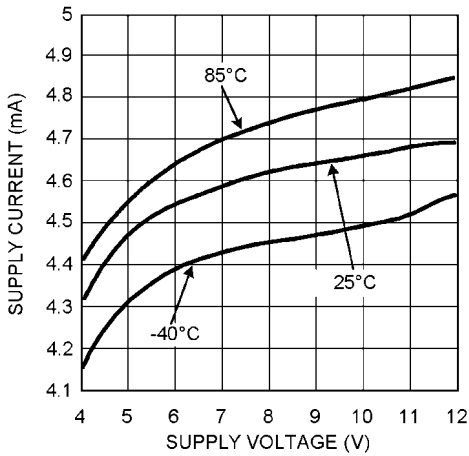


20016535

**Supply Current per Channel vs. Temperature**

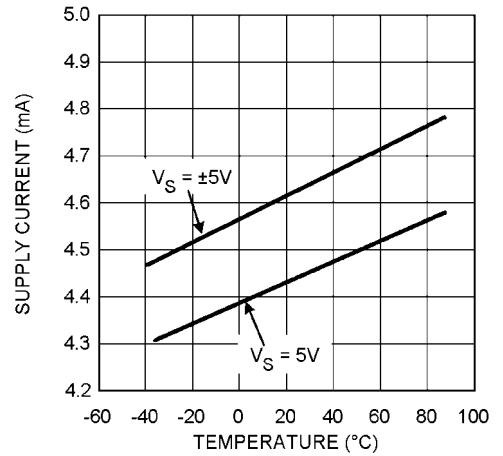


20016548

Offset Voltage vs. Supply Voltage ( $V_{CM} = 0V$ )

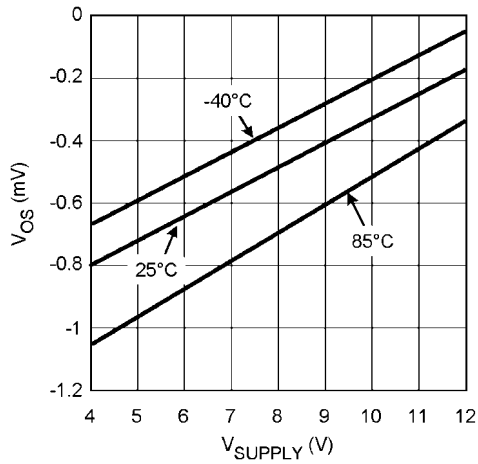


20016549

Offset Voltage vs. Common Mode

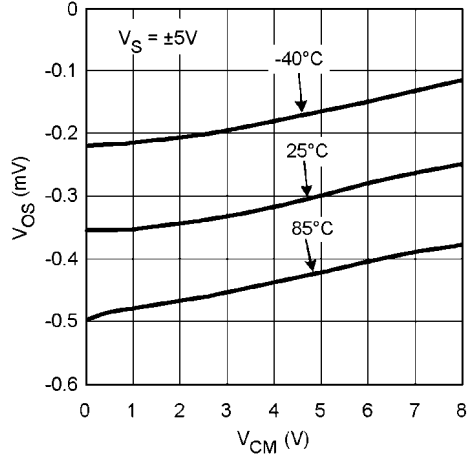


20016532

Offset Voltage vs. Common Mode

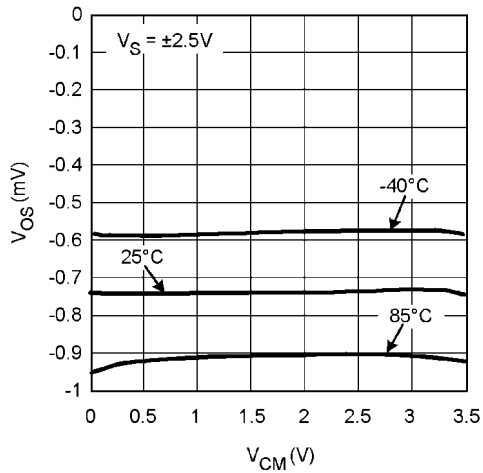


20016539

Bias Current and Offset Voltage vs. Temperature

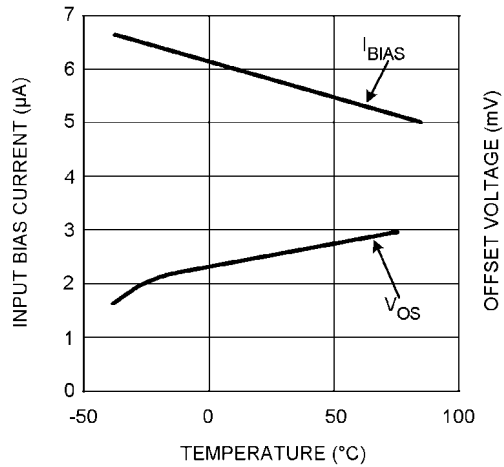


20016551

Bias Current vs. Common Mode Voltage

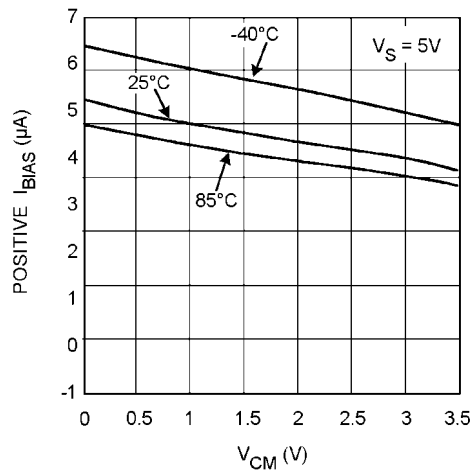


20016537

Bias Current vs. Common Mode Voltage

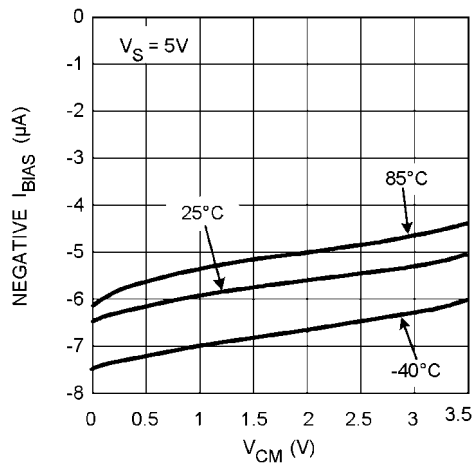


20016565

**A<sub>OL</sub>: PSRR and CMRR vs. Temperature**

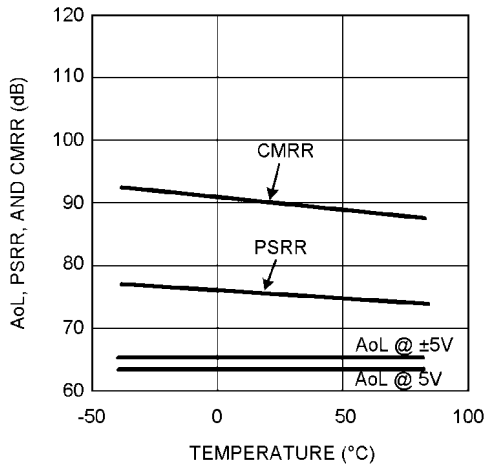

20016550


**Inverting Large Signal Pulse Response (V<sub>S</sub> = 5V)**

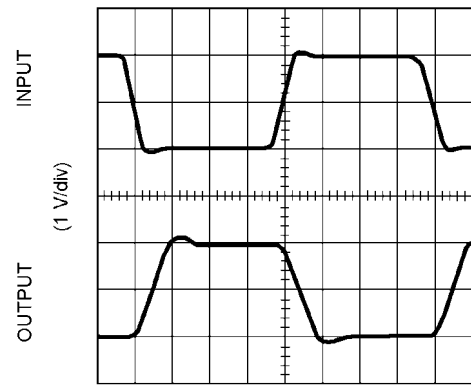

TIME (12.5 ns/div)

20016502


**Inverting Large Signal Pulse Response (V<sub>S</sub> = ±5V)**

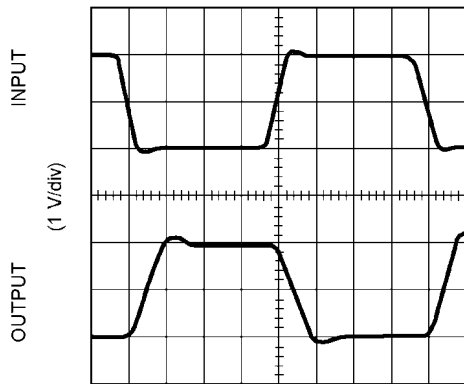

TIME (12.5 ns/div)

20016504


**Non-Inverting Large Signal Pulse Response (V<sub>S</sub> = 5V)**

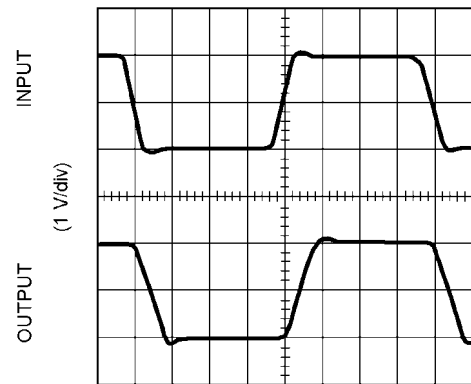

TIME (12.5 ns/div)

20016506


**Non-Inverting Large Signal Pulse Response (V<sub>S</sub> = ±5V)**

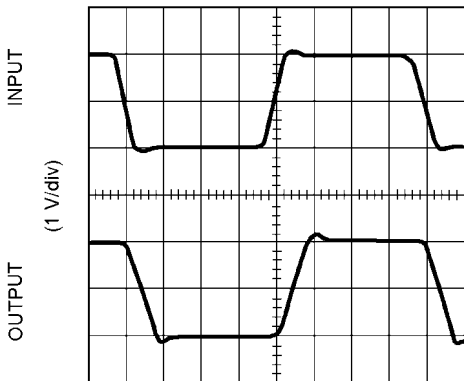

TIME (12.5 ns/div)

20016508

**Non-Inverting Small Signal Pulse Response (V<sub>S</sub> = 5V)**

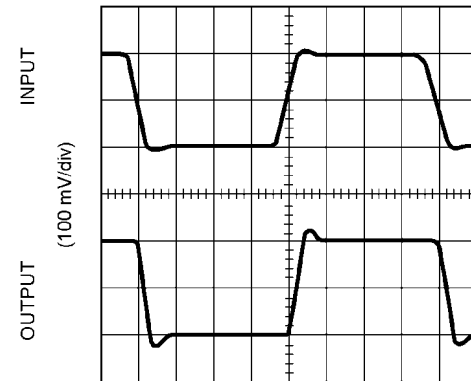


TIME (12.5 ns/div)

20016505




Non-Inverting Small Signal Pulse Response ( $V_S = \pm 5V$ )

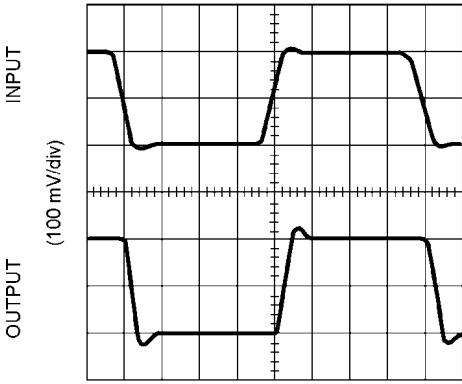

TIME (12.5 ns/div)

20016507


Inverting Small Signal Pulse Response ( $V_S = 5V$ )

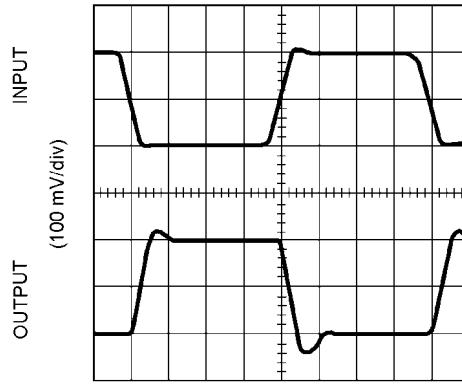

TIME (12.5 ns/div)

20016501


Inverting Small Signal Pulse Response ( $V_S = \pm 5V$ )

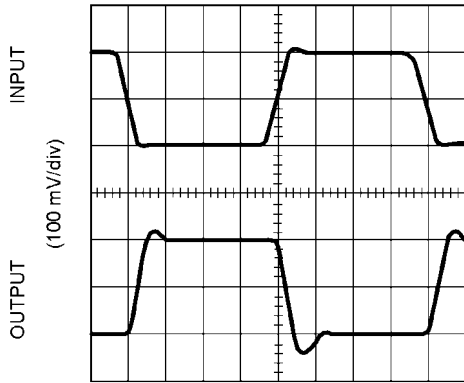

TIME (12.5 ns/div)


20016503

Input Voltage and Current Noise vs. Frequency ( $V_S = 5V$ )

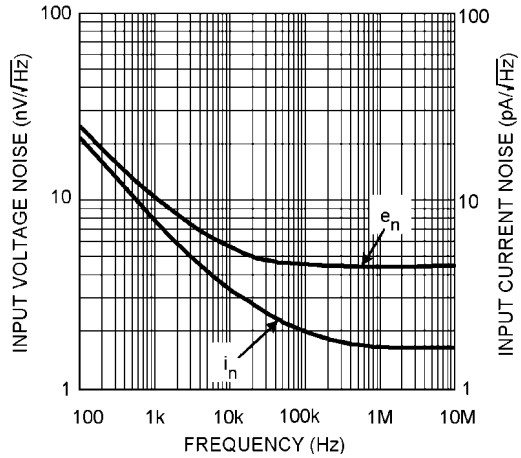


20016513

Input Voltage and Current Noise vs. Frequency ( $V_S = \pm 5V$ )

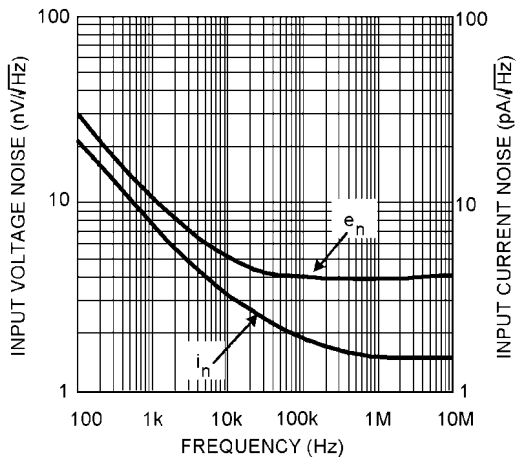


20016514

Harmonic Distortion vs. Frequency  
 $G = +1, V_O = 2 V_{PP}, V_S = 5V$

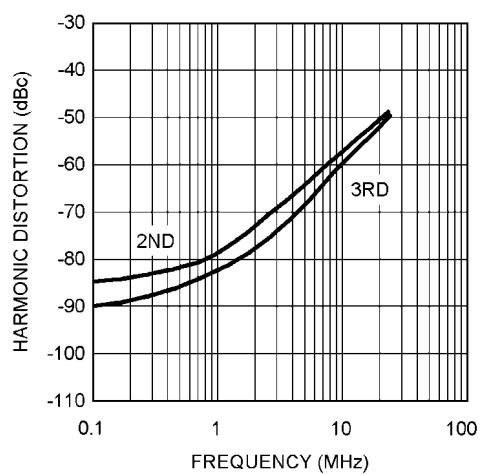


20016517

**Harmonic Distortion vs. Frequency**  
 $G = +1, V_O = 2 V_{PP}, V_S = \pm 5V$

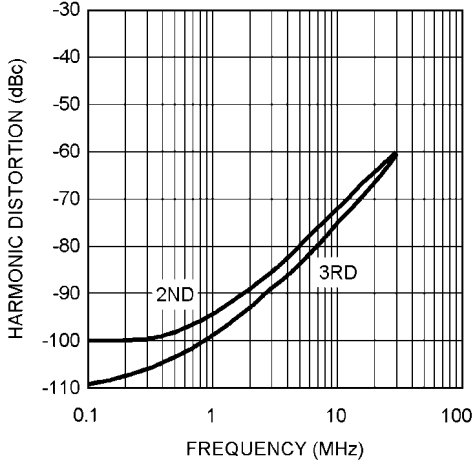


20016518

**Harmonic Distortion vs. Temperature**  
 $V_S = 5V, f = 5 \text{ MHz}, V_O = 2 V_{PP}$

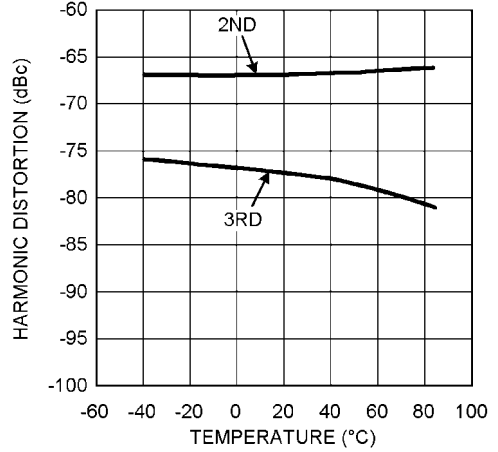


20016529

**Harmonic Distortion vs. Temperature**  
 $V_S = \pm 5V, f = 5 \text{ MHz}, V_O = 2 V_{PP}$

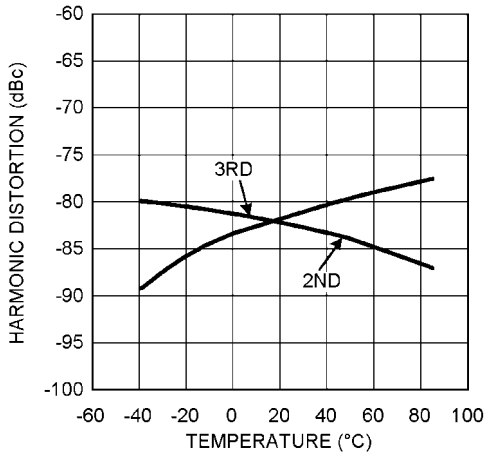


20016528

**Harmonic Distortion vs. Gain**  
 $V_S = 5V, f = 5 \text{ MHz}, V_O = 2 V_{PP}$

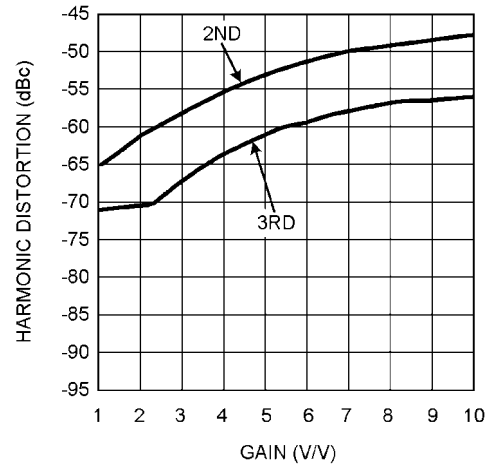


20016531

**Harmonic Distortion vs. Gain**  
 $V_S = \pm 5V, f = 5 \text{ MHz}, V_O = 2 V_{PP}$

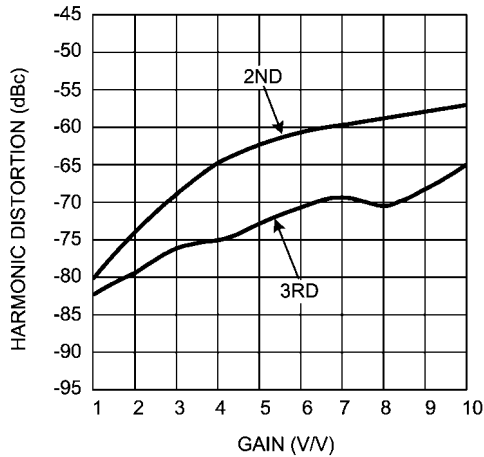


20016530

**Harmonic Distortion vs. Output Swing**  
 $(G = +2, V_S = 5V, f = 5 \text{ MHz})$

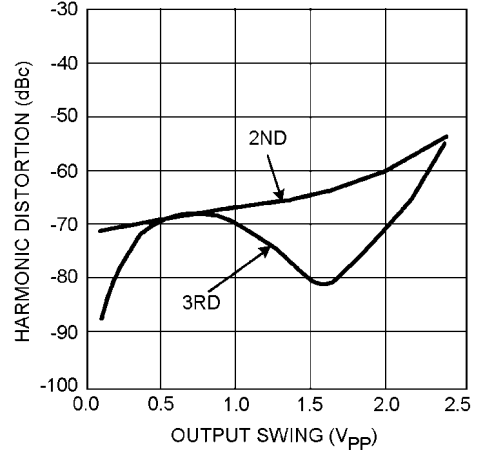


20016559

**Harmonic Distortion vs. Output Swing**  
( $G = +2$ ,  $V_S = \pm 5V$ ,  $f = 5\text{ MHz}$ )

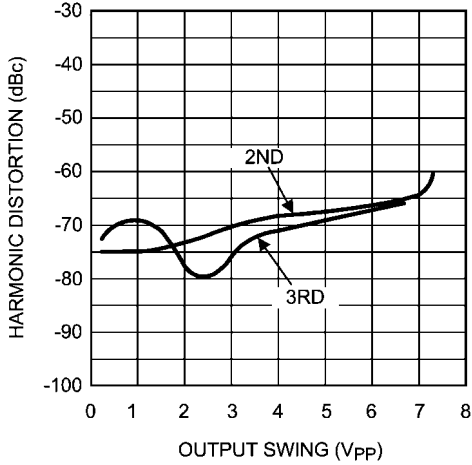


20016522

**PSRR vs. Frequency**

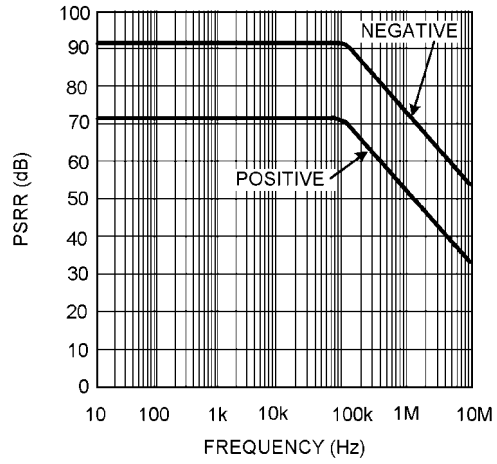


20016516

**CMRR vs. Frequency**

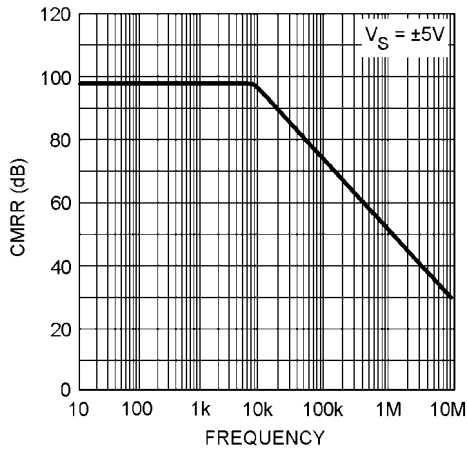


20016564

**Output Sinking Current**

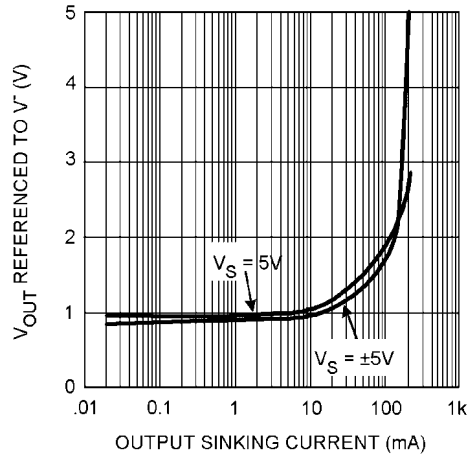


20016546

**Output Sourcing Current**

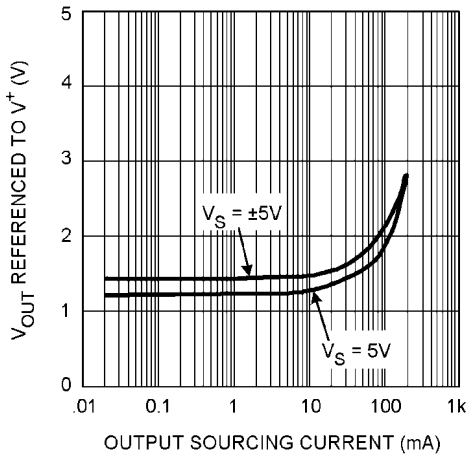


20016547

**CrossTalk vs. Frequency (LMH6655 only)**

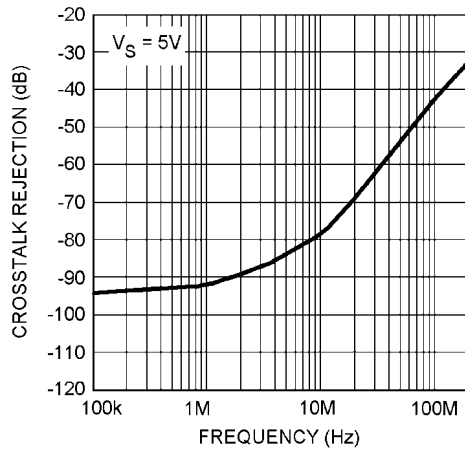


20016561

CrossTalk vs. Frequency (LMH6655 only)

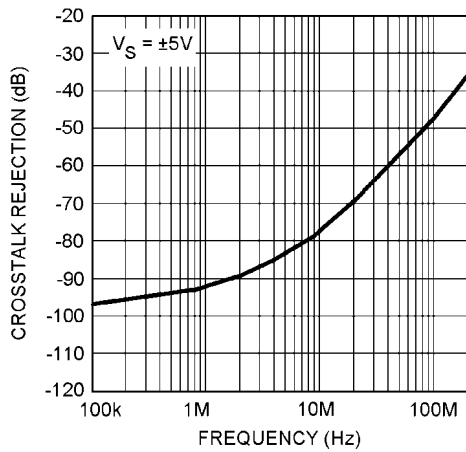


20016562

Isolation Resistance vs. Capacitive Load

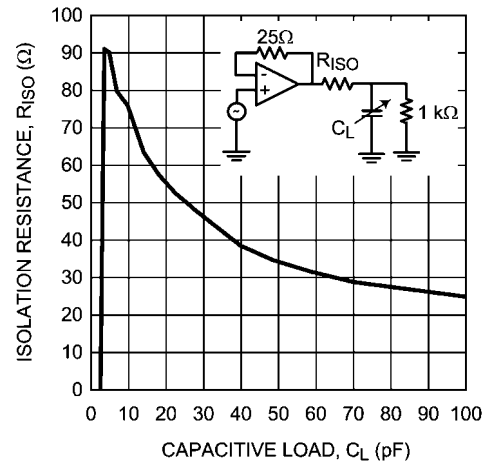

20016563

Open Loop Gain and Phase vs. Frequency

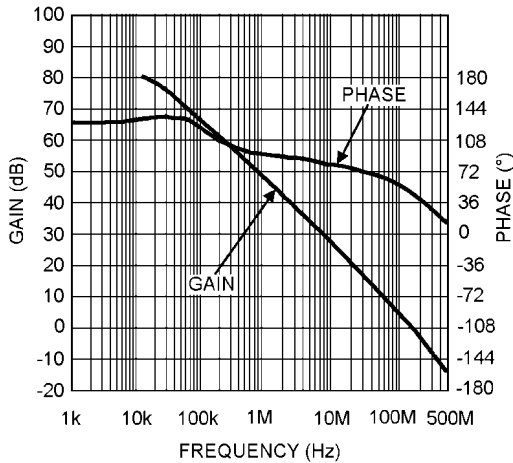

20016527

## Application Information

### GENERAL INFORMATION


The LMH6654 single and LMH6655 dual high speed, voltage feedback amplifiers are manufactured on National Semiconductor's new VIP10 (Vertically Integrated PNP) complementary bipolar process. These amplifiers can operate from  $\pm 2.5V$  to  $\pm 6V$  power supply. They offer low supply current, wide bandwidth, very low voltage noise and large output swing. Many of the typical performance plots found in the datasheet can be reproduced if  $50\Omega$  coax and  $50\Omega$   $R_{IN}/R_{OUT}$  resistors are used.

### CIRCUIT LAYOUT CONSIDERATION

With all high frequency devices, board layouts with stray capacitance have a strong influence on the AC performance. The LMH6654/LMH6655 are not exception and the inverting input and output pins are particularly sensitive to the coupling of parasitic capacitance to AC ground. Parasitic capacitances on the inverting input and output nodes to ground could cause frequency response peaking and possible circuit oscillation. Therefore, the power supply, ground traces and ground plan should be placed away from the inverting input and output pins. Also, it is very important to keep the parasitic capacitance across the feedback to an absolute minimum.

The PCB should have a ground plane covering all unused portion of the component side of the board to provide a low impedance path. All trace lengths should be minimized to reduce series inductance.

Supply bypassing is required for the amplifiers performance. The bypass capacitors provide a low impedance return current path at the supply pins. They also provide high frequency filtering on the power supply traces. It is recommended that a ceramic decoupling capacitor  $0.1 \mu F$  chip should be placed with one end connected to the ground plane and the other side as close as possible to the power pins. An additional  $10 \mu F$  tantalum electrolytic capacitor should be connected in parallel, to supply current for fast large signal changes at the output.

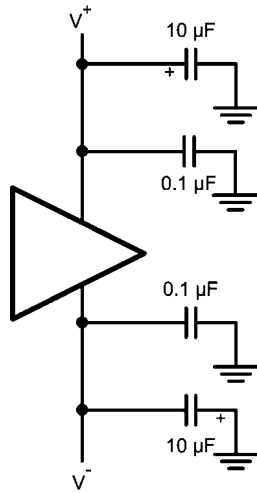

20016541

**FIGURE 1.**

**EVALUATION BOARDS**

National provides the following evaluation boards as a guide for high frequency layout and as an aid in device testing and characterization.

Device	Package	Evaluation Board PN
LMH6654MF	5-Pin SOT-23	CLC730068
LMH6654MA	8-Pin SOIC	CLC730027
LMH6655MA	8-Pin SOIC	CLC730036
LMH6655MM	8-Pin MSOP	CLC730123

The free evaluation board are shipped automatically when a device sample request is placed with National Semiconductor.

The CLC730027 datasheet also contains tables of recommended components to evaluate several of National’s high speed amplifiers. This table for the LMH6654 is illustrated below. Refer to the evaluation board datasheet for schematics and further information.

Components Needed to Evaluate the LMH6654 on the Evaluation Board:

- $R_f, R_g$  use the datasheet to select values.
- $R_{IN}, R_{OUT}$  typically  $50\Omega$  (Refer to the Basic Operation section of the evaluation board datasheet for details)
- $R_f$  is an optional resistor for inverting again configurations (select  $R_f$  to yield desired input impedance =  $R_g || R_f$ )
- $C_1, C_2$  use  $0.1 \mu F$  ceramic capacitors
- $C_3, C_4$  use  $10 \mu F$  tantalum capacitors

Components not used:

1.  $C_5, C_6, C_7, C_8$
2. R1 thru R8

The evaluation boards are designed to accommodate dual supplies. The board can be modified to provide single operation. For best performance;

- 1) do not connect the unused supply.
- 2) ground the unused supply pin.

**POWER DISSIPATION**

The package power dissipation should be taken into account when operating at high ambient temperature and/or high power dissipative conditions. In determining maximum operable


temperature of the device, make sure the total power dissipation of the device is considered; this power dissipated in the device with a load connected to the output as well as the nominal dissipation of the op amp.

**DRIVING CAPACITIVE LOADS**

Capacitive loads decrease the phase margin of all op amps. The output impedance of a feedback amplifier becomes inductive at high frequencies, creating a resonant circuit when the load is capacitive. This can lead to overshoot, ringing and oscillation. To eliminate oscillation or reduce ringing, an isolation resistor can be placed as shown in Figure 2 below. At frequencies above

$$F = \frac{1}{2 \pi R_{ISO} C_{LOAD}}$$

the load impedance of the Amplifier approaches  $R_{ISO}$ . The desired performance depends on the value of the isolation resistor. The isolation resistance vs. capacitance load graph in the typical performance characteristics provides the means for selection of the value of  $R_S$  that provides  $\leq 3$  dB peaking in closed loop  $A_v = 1$  response. In general, the bigger the isolation resistor, the more damped the pulse response becomes. For initial evaluation, a  $50\Omega$  isolation resistor is recommended.

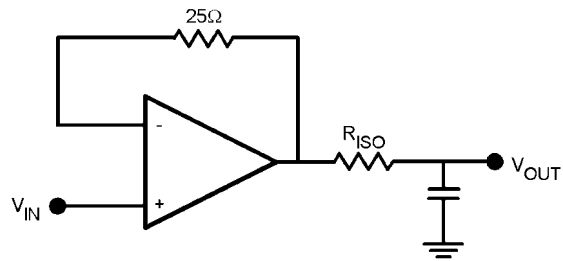

20016540

**FIGURE 2.**

### COMPONENTS SELECTION AND FEEDBACK RESISTOR

It is important in high-speed applications to keep all component leads short since wires are inductive at high frequency. For discrete components, choose carbon composition axially leaded resistors and micro type capacitors. Surface mount components are preferred over discrete components for minimum inductive effect. Never use wire wound type resistors in high frequency applications.

Large values of feedback resistors can couple with parasitic capacitance and cause undesired effects such as ringing or oscillation in high-speed amplifiers. Keep resistors as low as possible consistent with output loading consideration. For a gain of 2 and higher, 402 $\Omega$  feedback resistor used for the typical performance plots gives optimal performance. For unity gain follower, a 25 $\Omega$  feedback resistor is recommended rather than a direct short. This effectively reduces the Q of what


would otherwise be a parasitic inductance (the feedback wire) into the parasitic capacitance at the inverting input.

### BIAS CURRENT CANCELLATION

In order to cancel the bias current errors of the non-inverting configuration, the parallel combination of the gain setting  $R_g$  and feedback  $R_f$  resistors should equal the equivalent source resistance  $R_{seq}$  as defined in *Figure 3*. Combining this constraint with the non-inverting gain equation, allows both  $R_f$  and  $R_g$  to be determined explicitly from the following equations:


$$R_f = A_V R_{seq} \text{ and } R_g = R_f / (A_V - 1)$$

For inverting configuration, bias current cancellation is accomplished by placing a resistor  $R_b$  on the non-inverting input equal in value to the resistance seen by the inverting input ( $R_f // (R_g + R_s)$ ). The additional noise contribution of  $R_b$  can be minimized through the use of a shunt capacitor.

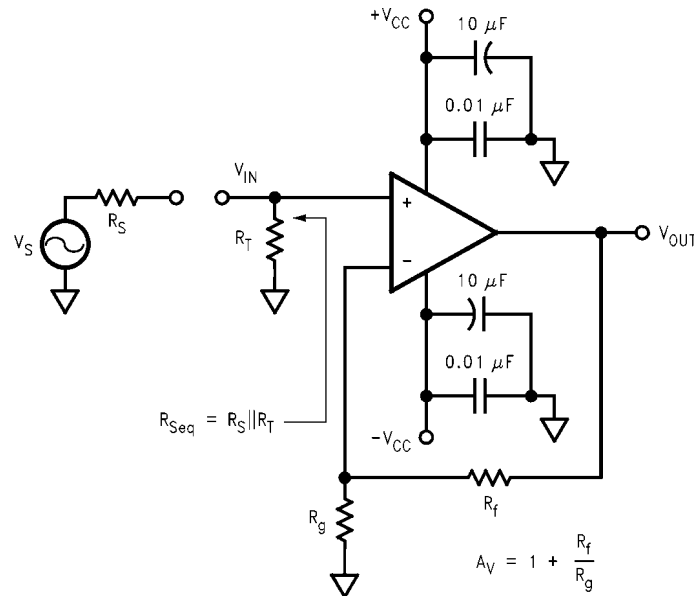

20016542

FIGURE 3. Non-Inverting Amplifier Configuration

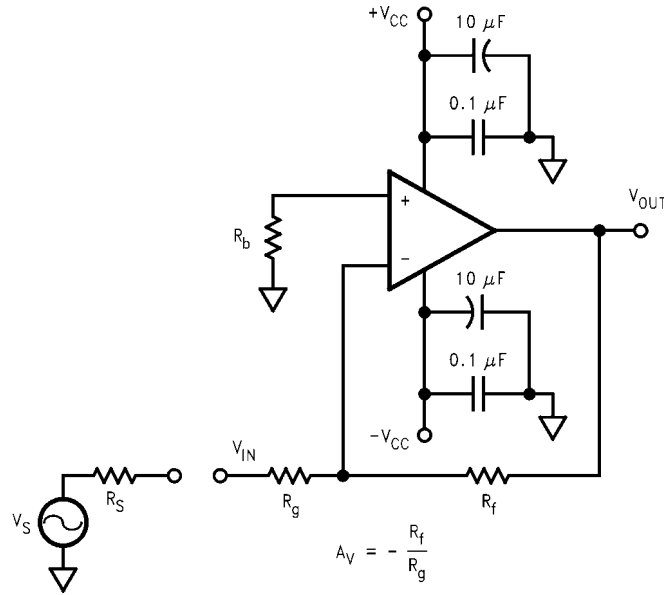


20016543

FIGURE 4. Inverting Amplifier Configuration

**TOTAL INPUT NOISE VS. SOURCE RESISTANCE**

The noise model for the non-inverting amplifier configuration showing all noise sources is described in Figure 5. In addition to the intrinsic input voltage noise ( $e_n$ ) and current noise ( $i_n = i_{n+} = i_{n-}$ ) sources, there also exists thermal voltage noise  $e_t = \sqrt{4kTR}$  associated with each of the external resistors. Equation 1 provides the general form for total equivalent input voltage noise density ( $e_{ni}$ ). Equation 2 is a simplification of Equation 1 that assumes

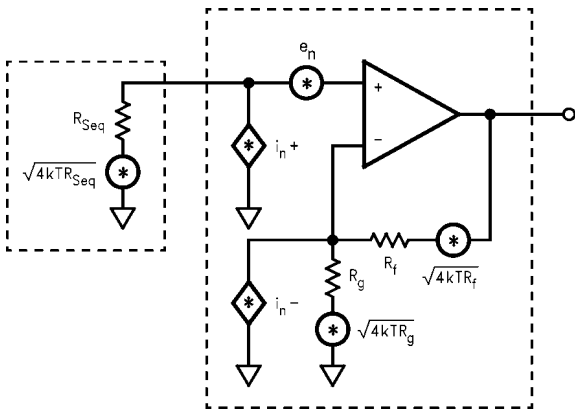

20016544

FIGURE 5. Non-Inverting Amplifier Noise Model


$$e_{ni} = \sqrt{e_n^2 + (i_n + R_{seq})^2 + 4kTR_{seq} + (i_n - (R_f \parallel R_g))^2 + 4kT(R_f \parallel R_g)} \quad (1)$$

**Noise Figure**

Noise Figure (NF) is a measure of the noise degradation caused by an amplifier.

$$NF = 10 \text{LOG} \left[ \frac{S_f/N_i}{S_o/N_o} \right] = 10 \text{LOG} \left[ \frac{e_{ni}^2}{e_t^2} \right] \quad (3)$$

$R_f \parallel R_g = R_{seq}$  for bias current cancellation. Figure 6 illustrates the equivalent noise model using this assumption. The total equivalent output voltage noise ( $e_{no}$ ) is  $e_{ni} * A_V$ .

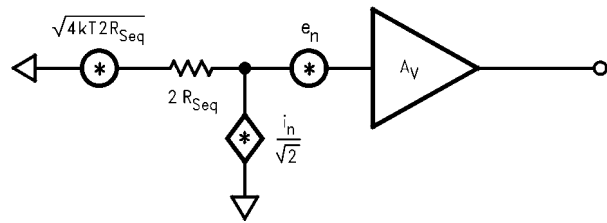

20016545

FIGURE 6. Noise Model with  $R_f \parallel R_g = R_{seq}$

$$e_{ni} = \sqrt{e_n^2 + 2 (i_n R_{seq})^2 + 4kT (2R_{seq})} \quad (2)$$

If bias current cancellation is not a requirement, then  $R_f \parallel R_g$  does not need to equal  $R_{seq}$ . In this case, according to Equation 1,  $R_f R_g$  should be as low as possible in order to minimize noise. Results similar to Equation 1 are obtained for the inverting configuration on Figure 2 if  $R_{seq}$  is replaced by  $R_b$  and  $R_g$  is replaced by  $R_g + R_s$ . With these substitutions, Equation 1 will yield an  $e_{ni}$  referred to the non-inverting input. Referring to  $e_{ni}$  to the inverting input is easily accomplished by multiplying  $e_{ni}$  by the ratio of non-inverting to inverting gains.

The noise figure formula is shown in Equation 3. The addition of a terminating resistor  $R_T$ , reduces the external thermal noise but increases the resulting NF.

The NF is increased because the  $R_T$  reduces the input signal amplitude thus reducing the input SNR.

$$NF = 10 \text{ LOG} \left[ \frac{e_n^2 + i_n^2 (R_{seq} + (R_f \parallel R_g)^2 + 4kTR_{seq} + 4kt (R_f \parallel R_g)}{4kTR_{seq}} \right] \quad (4)$$

The noise figure is related to the equivalent source resistance ( $R_{seq}$ ) and the parallel combination of  $R_f$  and  $R_g$ . To minimize noise figure, the following steps are recommended:




1. Minimize  $R_f \parallel R_g$
2. Choose the Optimum  $R_s$  ( $R_{OPT}$ )

$R_{OPT}$  is the point at which the NF curve reaches a minimum and is approximated by:

$$R_{OPT} \approx (e_n/i_n)$$






**Physical Dimensions** inches (millimeters) unless otherwise noted

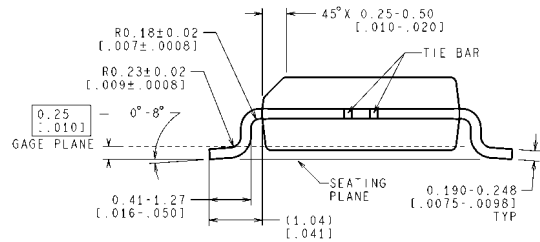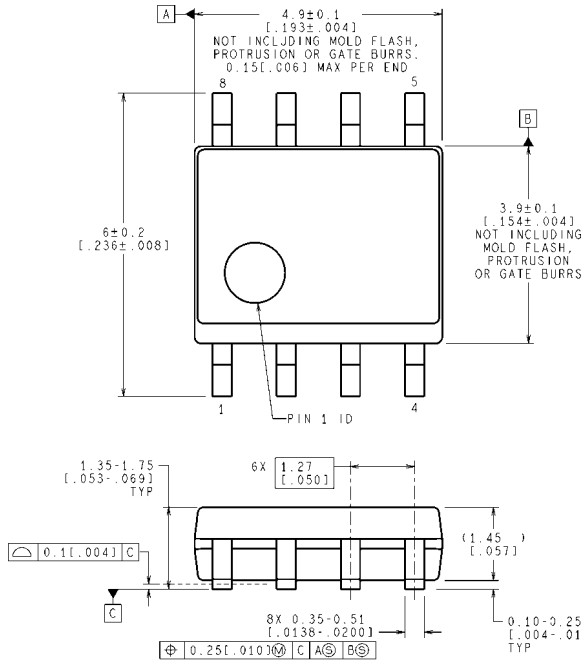

CONTROLLING DIMENSION IS MILLIMETER  
VALUES IN [ ] ARE INCHES  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

M08A (Rev M)


**8-Pin SOIC  
NS Package Number M08A**

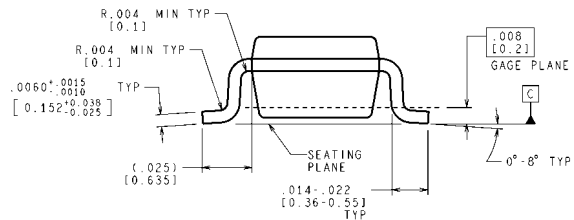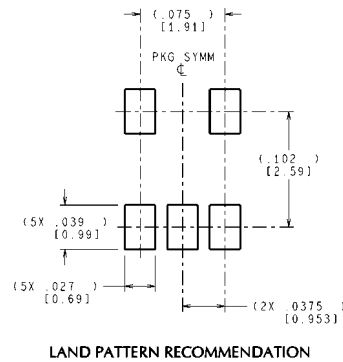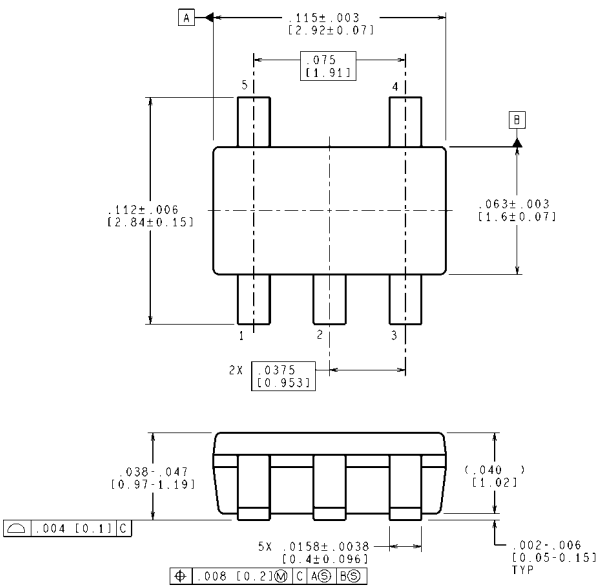

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

MF05A (Rev D)

**5-Pin SOT-23  
NS Package Number MF05A**

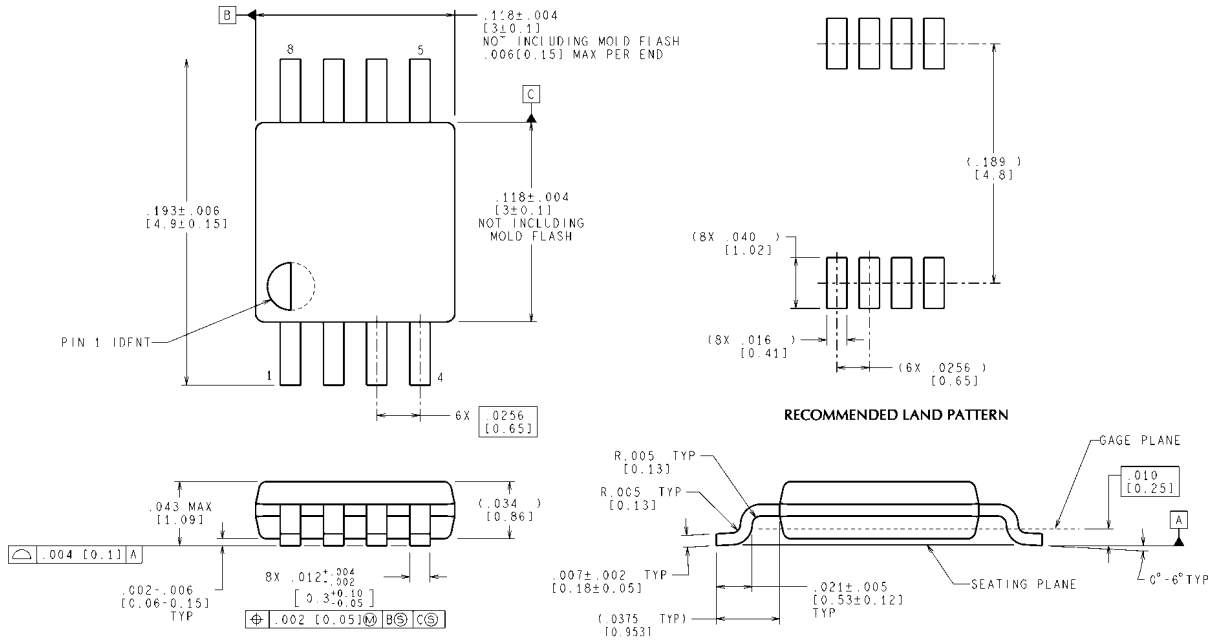

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

**8-Pin MSOP  
NS Package Number MUA08A**

MUA08A (Rev F)

# Notes

LMH6654/LMH6655

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	<a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>	WEBENCH® Tools	<a href="http://www.national.com/webench">www.national.com/webench</a>
Audio	<a href="http://www.national.com/audio">www.national.com/audio</a>	App Notes	<a href="http://www.national.com/appnotes">www.national.com/appnotes</a>
Clock and Timing	<a href="http://www.national.com/timing">www.national.com/timing</a>	Reference Designs	<a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>
Data Converters	<a href="http://www.national.com/adc">www.national.com/adc</a>	Samples	<a href="http://www.national.com/samples">www.national.com/samples</a>
Interface	<a href="http://www.national.com/interface">www.national.com/interface</a>	Eval Boards	<a href="http://www.national.com/evalboards">www.national.com/evalboards</a>
LVDS	<a href="http://www.national.com/lvds">www.national.com/lvds</a>	Packaging	<a href="http://www.national.com/packaging">www.national.com/packaging</a>
Power Management	<a href="http://www.national.com/power">www.national.com/power</a>	Green Compliance	<a href="http://www.national.com/quality/green">www.national.com/quality/green</a>
Switching Regulators	<a href="http://www.national.com/switchers">www.national.com/switchers</a>	Distributors	<a href="http://www.national.com/contacts">www.national.com/contacts</a>
LDOs	<a href="http://www.national.com/ldo">www.national.com/ldo</a>	Quality and Reliability	<a href="http://www.national.com/quality">www.national.com/quality</a>
LED Lighting	<a href="http://www.national.com/led">www.national.com/led</a>	Feedback/Support	<a href="http://www.national.com/feedback">www.national.com/feedback</a>
Voltage Reference	<a href="http://www.national.com/vref">www.national.com/vref</a>	Design Made Easy	<a href="http://www.national.com/easy">www.national.com/easy</a>
PowerWise® Solutions	<a href="http://www.national.com/powerwise">www.national.com/powerwise</a>	Solutions	<a href="http://www.national.com/solutions">www.national.com/solutions</a>
Serial Digital Interface (SDI)	<a href="http://www.national.com/sdi">www.national.com/sdi</a>	Mil/Aero	<a href="http://www.national.com/milaero">www.national.com/milaero</a>
Temperature Sensors	<a href="http://www.national.com/tempensors">www.national.com/tempensors</a>	SolarMagic™	<a href="http://www.national.com/solarmagic">www.national.com/solarmagic</a>
Wireless (PLL/VCO)	<a href="http://www.national.com/wireless">www.national.com/wireless</a>	PowerWise® Design University	<a href="http://www.national.com/training">www.national.com/training</a>

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor Americas Technical Support Center**  
 Email: [support@nsc.com](mailto:support@nsc.com)  
 Tel: 1-800-272-9959

**National Semiconductor Europe Technical Support Center**  
 Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)

**National Semiconductor Asia Pacific Technical Support Center**  
 Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan Technical Support Center**  
 Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)