

**Thick Film Chip Resistors**  
**01005, 0201, 0402, 0603, 0805,**  
**1206, 1210, 1812, 2010, 2512**

Type: **ERJ XG, 1G, 2G, 3G, 6G, 8G,**  
**14, 12, 12Z, 1T**



■ **Features**

- Small size and lightweight
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines  
Taping packaging available
- Suitable for both reflow and flow soldering
- Reference Standards  
IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B

RoHS compliant

■ **Packaging Methods** Please see Pages 40 to 43


■ **Recommended Land Pattern** Please see Pages 44 to 45

■ **Recommended Soldering Conditions** Please see Page 46


■ **Safety Precautions** Please see Page 47

■ **Explanation of Part Numbers**


- ERJXGN, 1GN, 2GE, 3GE, 6GE, 8GE, 14, 12, 12Z, 1T Series, ±5 % type

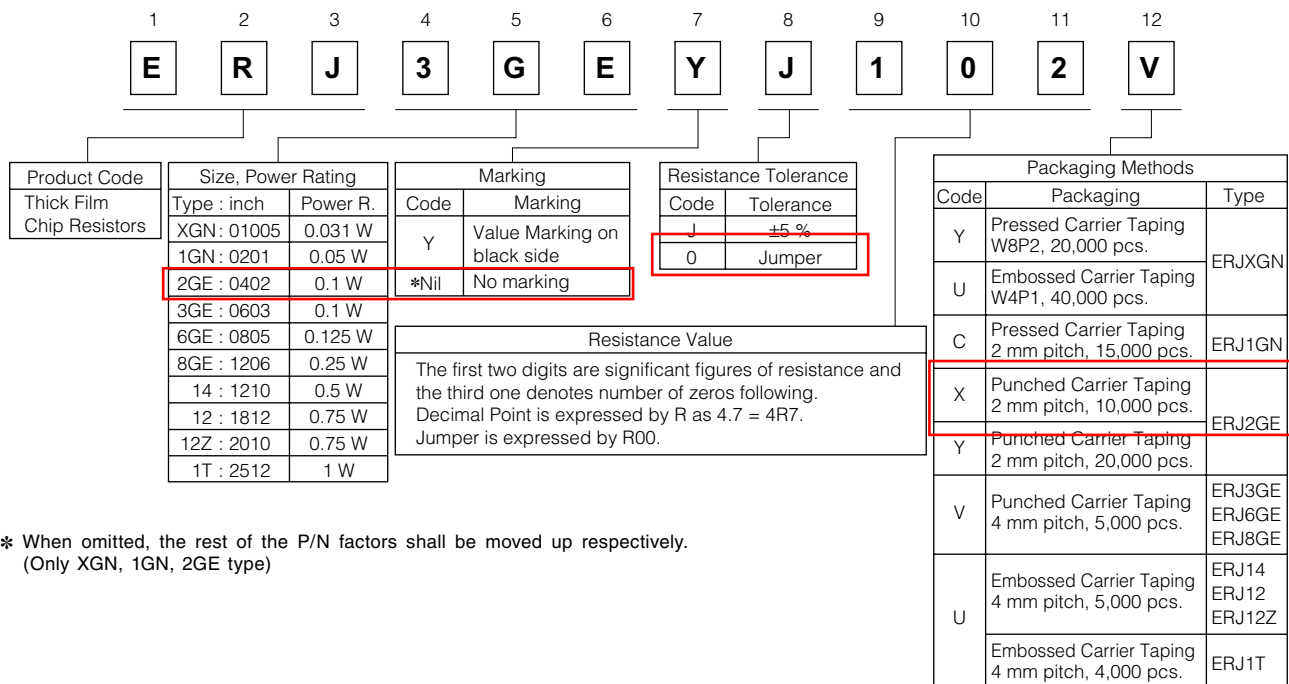

### Construction

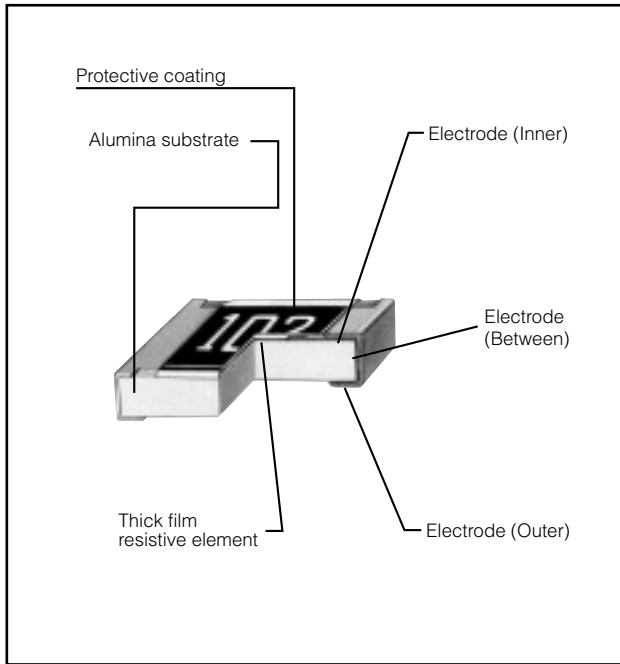

### Dimensions in mm (not to scale)

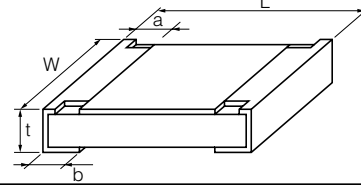

| Type<br>(inch size) | Dimensions (mm)                        |  |                       |                       |                       | Mass (Weight)<br>(g/1000 pcs.) |
|---------------------|--|--|-----------------------|-----------------------|-----------------------|--------------------------------|
|                     | L                                      | W                                      | a                     | b                     | t                     |                                |
| ERJXG<br>(01005)    | 0.40 <sup>+0.02</sup>                  | 0.20 <sup>+0.02</sup>                  | 0.10 <sup>+0.03</sup> | 0.10 <sup>+0.03</sup> | 0.13 <sup>+0.02</sup> | 0.04                           |
| ERJ1G<br>(0201)     | 0.60 <sup>+0.03</sup>                  | 0.30 <sup>+0.03</sup>                  | 0.10 <sup>+0.05</sup> | 0.15 <sup>+0.05</sup> | 0.23 <sup>+0.03</sup> | 0.15                           |
| ERJ2G<br>(0402)     | 1.00 <sup>+0.05</sup>                  | 0.50 <sup>+0.05</sup>                  | 0.20 <sup>+0.10</sup> | 0.25 <sup>+0.05</sup> | 0.35 <sup>+0.05</sup> | 0.8                            |
| ERJ3G<br>(0603)     | 1.60 <sup>+0.15</sup>                  | 0.80 <sup>+0.15</sup> <sub>-0.05</sub> | 0.30 <sup>+0.20</sup> | 0.30 <sup>+0.15</sup> | 0.45 <sup>+0.10</sup> | 2                              |
| ERJ6G<br>(0805)     | 2.00 <sup>+0.20</sup>                  | 1.25 <sup>+0.10</sup>                  | 0.40 <sup>+0.20</sup> | 0.40 <sup>+0.20</sup> | 0.60 <sup>+0.10</sup> | 4                              |
| ERJ8G<br>(1206)     | 3.20 <sup>+0.05</sup> <sub>-0.20</sub> | 1.60 <sup>+0.05</sup> <sub>-0.15</sub> | 0.50 <sup>+0.20</sup> | 0.50 <sup>+0.20</sup> | 0.60 <sup>+0.10</sup> | 10                             |
| ERJ14<br>(1210)     | 3.20 <sup>+0.20</sup>                  | 2.50 <sup>+0.20</sup>                  | 0.50 <sup>+0.20</sup> | 0.50 <sup>+0.20</sup> | 0.60 <sup>+0.10</sup> | 16                             |
| ERJ12<br>(1812)     | 4.50 <sup>+0.20</sup>                  | 3.20 <sup>+0.20</sup>                  | 0.50 <sup>+0.20</sup> | 0.50 <sup>+0.20</sup> | 0.60 <sup>+0.10</sup> | 27                             |
| ERJ12Z<br>(2010)    | 5.00 <sup>+0.20</sup>                  | 2.50 <sup>+0.20</sup>                  | 0.60 <sup>+0.20</sup> | 0.60 <sup>+0.20</sup> | 0.60 <sup>+0.10</sup> | 27                             |
| ERJ1T<br>(2512)     | 6.40 <sup>+0.20</sup>                  | 3.20 <sup>+0.20</sup>                  | 0.65 <sup>+0.20</sup> | 0.60 <sup>+0.20</sup> | 0.60 <sup>+0.10</sup> | 45                             |

### Ratings

<For Resistor>

| Type<br>(inch size) | Power Rating<br>at 70 °C<br>(W) | Limiting Element<br>Voltage <sup>(1)</sup><br>(V) | Maximum Overload<br>Voltage <sup>(2)</sup><br>(V) | Resistance<br>Tolerance<br>(%) | Resistance<br>Range<br>(Ω) | T.C.R.<br>(×10 <sup>-6</sup> /°C)                              | Category<br>Temperature Range<br>(°C) |             |
|---------------------|---------------------------------|---|---|--------------------------------|----------------------------|--|---------------------------------------|-------------|
| ERJXG<br>(01005)    | 0.031                           | 15  | 30  | ±5                             | 4.7 to 1 M (E24)           | <10 Ω : -100 to +600<br>10 Ω to 100 Ω : ±300<br>100 Ω < : ±200 | -55 to +125                           |             |
| ERJ1G<br>(0201)     | 0.05                            | 25  | 50  | ±5                             | 1 to 10 M (E24)            | 10 Ω to 1 M Ω :<br>±200  | -55 to +125                           |             |
| ERJ2G<br>(0402)     | 0.1                             | 50  | 100   | ±5                             | 1 to 10 M (E24)            |  | <10 Ω :<br>-100 to +600               | -55 to +155 |
| ERJ3G<br>(0603)     | 0.1                             | 75  | 150   | ±5                             | 1 to 10 M (E24)            |  | -55 to +155                           |             |
| ERJ6G<br>(0805)     | 0.125                           | 150   | 200   | ±5                             | 1 to 10 M (E24)            |  | -55 to +155                           |             |
| ERJ8G<br>(1206)     | 0.25                            | 200   | 400   | ±5                             | 1 to 10 M (E24)            |  | -55 to +155                           |             |
| ERJ14<br>(1210)     | 0.5                             | 200   | 400   | ±5                             | 1 to 10 M (E24)            |  | -55 to +155                           |             |
| ERJ12<br>(1812)     | 0.75                            | 200   | 500   | ±5                             | 1 to 10 M (E24)            |  | -55 to +155                           |             |
| ERJ12Z<br>(2010)    | 0.75                            | 200   | 500   | ±5                             | 1 to 10 M (E24)            |  | -55 to +155                           |             |
| ERJ1T<br>(2512)     | 1                               | 200   | 500   | ±5                             | 1 to 1 M (E24)             |  | -55 to +155                           |             |
|                     |                                 |   |   |                                |                            |  | 1 M Ω < :<br>-400 to +150             | -55 to +155 |

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.

<For Jumper>

| Type<br>(inch size) | Rated Current<br>(A) | Maximum Overload Current<br>(A) |
|---------------------|----------------------|---------------------------------|
| ERJXG (01005)       | 0.5                  | 1                               |
| ERJ1G (0201)        |                      |                                 |
| ERJ2G (0402)        |                      |                                 |
| ERJ3G (0603)        | 1                    | 2                               |
| ERJ6G (0805)        |                      |                                 |
| ERJ8G (1206)        |                      |                                 |
| ERJ14 (1210)        |                      |                                 |
| ERJ12 (1812)        | 2                    | 4                               |
| ERJ12Z (2010)       |                      |                                 |
| ERJ1T (2512)        |                      |                                 |
|                     |                      |                                 |

### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

