


**Individual Part Number: F07320**

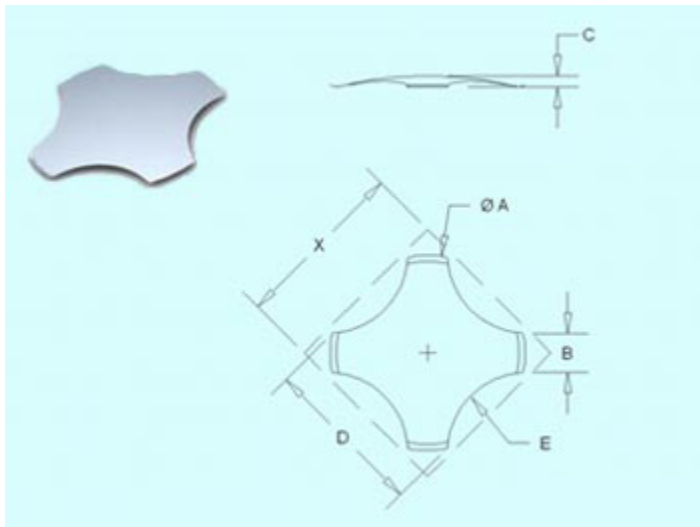

Dim. A:	7mm (.276")
Dim. B:	.055" (1.40mm)
Dim C:	.018" (.46mm)
Dim D:	n/a
Dim E:	.113" (2.87mm)
Dim F:	n/a
Dim G:	n/a
Dim X:	.25" (6.35mm)
Dim Y:	n/a
Dim Z:	n/a
Fmax/Force:	320g
Dimple:	No
Cycles Rated:	5,000,000
Contact Configuration:	SPST N.O.
Switching Voltage:	.1 to 50 VDC
Switching Capacity:	1 Watt
Switching Current:	.005 to 100 ma DC
Contact Bounce:	<.3ms make <.6ms break
Base Material:	SSTL
Plating:	Nickel/Silver/Gold optional
Operating Temp. Rating:	-45 degrees C to +100 degrees C
Storage Temp. Rating	-55 degrees C to +100 degrees C

© Copyright 2003-2009 Snaptron Inc.