
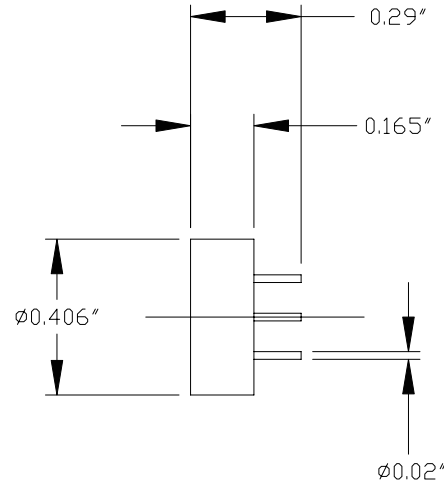



25-05412

REV.#	DESCRIPTION	NAME/DATE
A	INITIAL RELEASE	GM 01/08/99

3 SOCKETS ON A 0.200"
(5.08mm) DIAMETER CIRCLE
ACCEPTS $\phi 0.016"$ (0.41mm)
TO $\phi 0.020"$ (0.51mm) PINS

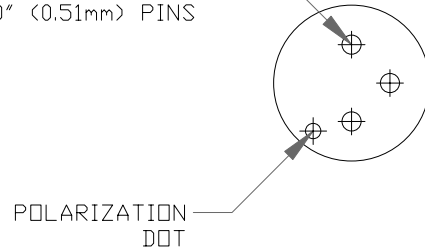


3 PINS ON A 0.200"
(5.08mm) DIAMETER CIRCLE



S8058 LASER DIODE SOCKET

SLEEVE: GOLD PLATED (10 MICRO-INCH) BRASS
CONTACT: GOLD PLATED (10 MICRO-INCH) BERYLLIUM-COPPER
INSULATOR BODY: TEFLON TFC



SPECIAL NOTE:

SOCKET CIRCLE DIAMETER IS NOT THE SAME AS PIN
CIRCLE DIAMETER AS SHOWN IN ABOVE DRAWING

SCALE: 2X

THORLABS		PO BOX 366 NEWTON NJ	
TITLE T05 DIODE PACKAGE SOCKET			
TOL: X.XXX=+/-0.005 X.XX=+/-0.010 ANGULAR +/-30'			
SURF. FINISH: 32 MICROINCHES UNLESS OTHERWISE NOTED			
DRAWN	ENGINEER	APPROVED	
GM	AC	AC	
MATERIAL AS NOTED			
DATE	REV	SIZE	SHEET
01/08/99	A	A	1 OF 1
DWG NO.	PART NO.	WHERE USED	
0673-E01	S8058	ENGINEERING SUPPORT DRAWING	