
## **REVISION DK**

DO NOT SCALE FROM THIS PRINT

TABLE 2				
BODY SPE	CIFICATION			
ROW/OPTION	USE BODY			
-S, -S-NA/-NE	TSW-50-S			
-S-RA/-RE	TSW-50-S-RA			
-D, -D-NA/-NE	RTSW-50-D			
-D-RA	TSW-50-D-RA			
-T, -T-NA/-NE	TSW-50-T			
-T-RA, -Q-RA	TSW-50-T-RA			
-Q	TSW-50-T			

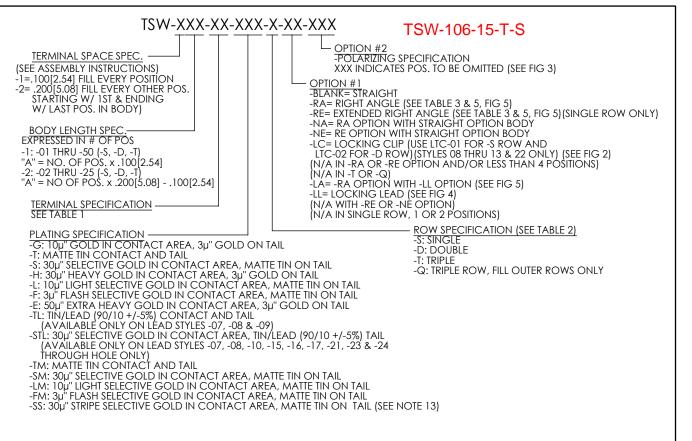



## 25-06295

NOTES:

- 1.  $\langle \overline{C} \rangle$  REPRESENTS CRITICAL DIMENSION.
- 2. MINIMUM TERMINAL PUSHOUT: 3 LBS.
- 3. MAXIMUM HEIGHT VARIATION: .005 [.13] (R.A. TAIL N/A).
- 4. ASSEMBLE GOLD PLATE END AS SHOWN.
- 5. STYLE -26: ROUND END TO APPEAR ON BOTTOM.
- 6. 'C'± .005[0.13] FOR STYLE -08, OPTION -LA & -RA ONLY.
- 7. TOW & SWAY SPEC. OF 2° APPLIES TO ALL POSITIONS. POST & TAIL. IN ALL DIRECTIONS.
- 8. ALL DIMENSIONS TO BE ABOUT CL WITHIN ±.005 [.13].
- 9. MEASURE FROM THE BEND RADIUS OF THE TERMINALS .
- 10. TSW-50-D BODY CAN BE USED IF RTSW-50-D IS UNAVAILABLE
- (C) 11. ORIENTATE PINS TO PREVENT BANDOLIER MARKS FROM SHOWING IN THE POST AREA. (SEE TABLE 7)
  - 12. MAXIMUM CUT FLASH: .020 [.50]
  - 13. -SS OPTION ONLY AVAILABLE IN STRAIGHT LEAD STYLES -07, -08 & -09, -RA STYLE -08 ONLY. CAN ONLY MATE WITH SSW, SSQ, SSM, ESW, ESQ AND BCS.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS ANGLES .XX: ±.001 [.3] 2* .XXX: ±.005 [.13] .XXXX: ±.0020 [.051]	PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITEN CONSENT OF SAMTEC, INC.	520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322				
MATERIAL: DO NOT SCALE BODIES: DUPONT PBT, UL 94 V TERMINALS: PHOS BRONZE		DESCRIPTION: .025[0.64] SQ. POST TERMINAL STRIP ASSEMBLY				
		TSW-XXX-XX-XXX-X-XXX-XXXX BY: KOLB 08/24/1988 SHEET 1 OF 6				

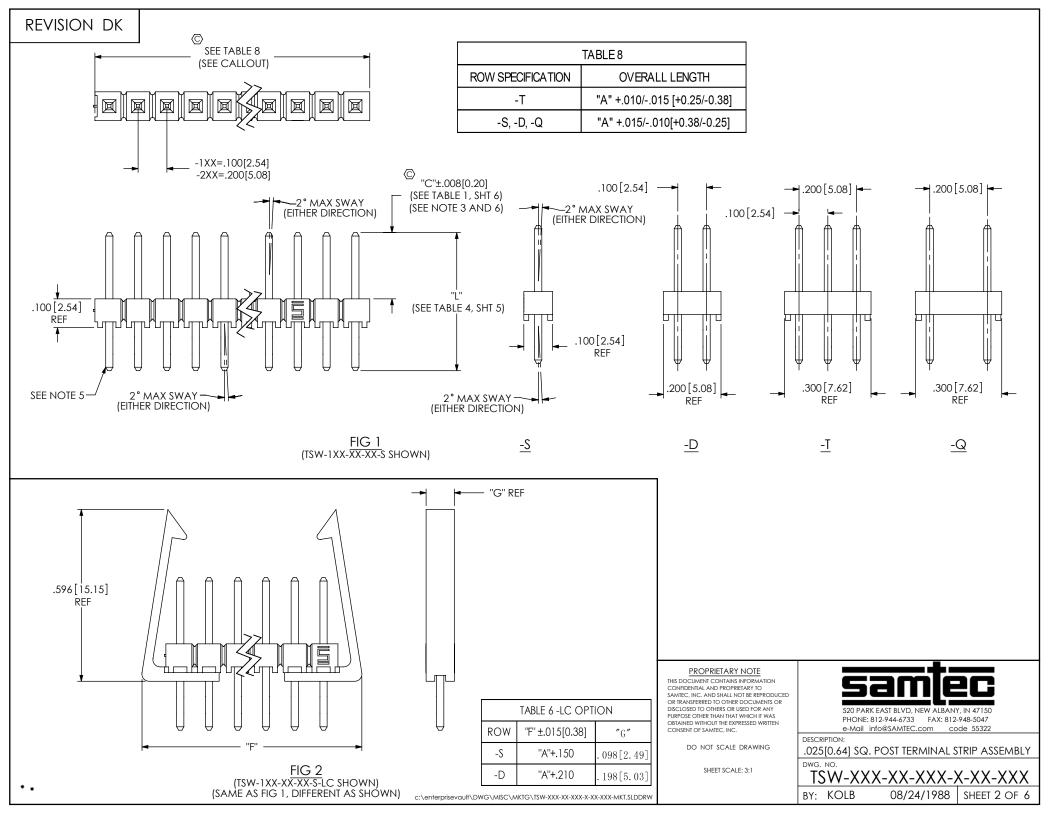

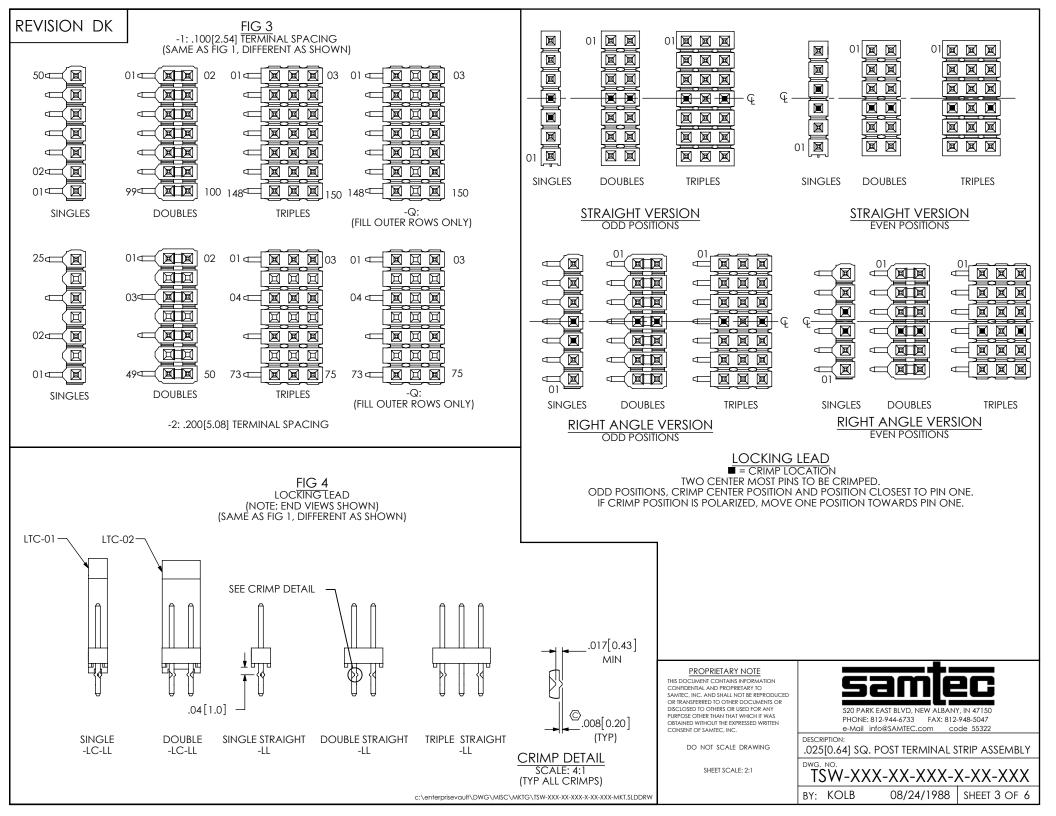

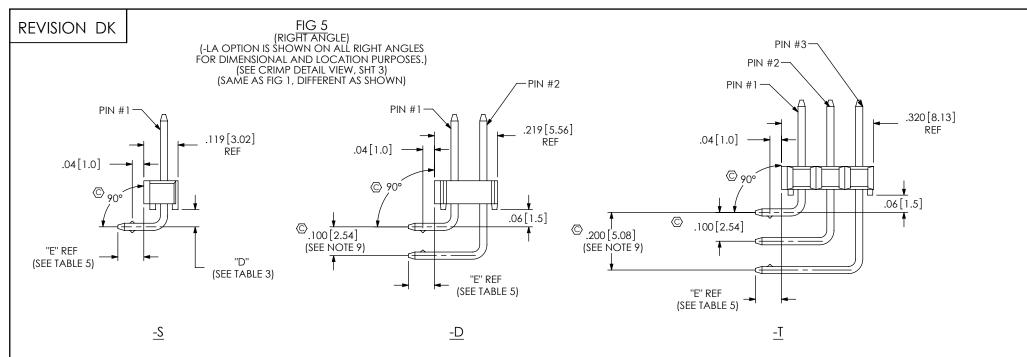


TABLE 3				
-ХХ	″D″			
-RA/-NA	.06[1.5]			
-RE/-NE	.16[4.1]			

TABLE 5 "E"								
LEAD STYLE	RA SINGLE	RE SINGLE	RA DOUBLE	RA TRIPLE	NA SINGLE	NE SINGLE	NA DOUBLE	NA TRIPLE
08	.090 [2.29]	N/A	.090 [2.29]	.090 [2.29]	.109 [2.77]	N/A	.109 [2.77]	. 109 [2. 77]
09	.290 [7.37]	.190 [4.83]	. 290 [7.37]	. 290 [7. 37]	.309 [7.85]	.209 [5.31]	.309 [7.85]	. 309 [7.85]
10	.390 [9.91]	. 290 [7. 37]	.390 [9.91]	. 390 [9. 91]	.409 [10.39]	.309 [7.85]	.409 [10.39]	. 409 [10. 39]
11	.490 [12.45]	.390 [9.91]	. 490 [12. 45]	. 490 [12. 45]	. 509 [12.93]	.409 [10.39]	.509 [12.93]	. 509 [12.93]
12	.590 [14.99]	.490 [12.45]	. 590 [14.99]	. 590 [14. 99]	.609 [15.47]	. 509 [12. 93]	.609 [15.47]	. 609 [15. 47]
13	.790 [20.07]	.690 [17.53]	. 790 [20.07]	N/A	.809 [20.55]	.709 [18.01]	.809 [20.55]	N/A
16	.200 [5.08]	.100 [2.54]	. 200 [5.08]	. 200 [5.08]	.219 [5.56]	.119 [3.02]	. 219 [5. 56]	. 219 [5. 56]
21	.990 [25.15]	.890 [22.61]	N/A	N/A	1.009 [25.63]	.909 [23.09]	N/A	N/A
22	.190 [4.83]	.090 [2.29]	.190 [4.83]	. 190 [4.83]	.209 [5.31]	.109 [2.77]	. 209 [5. 31]	. 209 [5. 31]
25	.100 [2.54]	N/A	.100 [2.54]	.100 [2.54]	.119 [3.02]	N/A	.119 [3.02]	.119 [3.02]
27	.890 [22.61]	.790 [20.07]	N/A	N/A	.909 [23.09]	.809 [20.55]	N/A	N/A
28	.690 [17.53]	.590 [14.99]	.690 [17.53]	N/A	.709 [18.01]	.609 [15.47]	.709 [18.01]	N/A
29	.800 [20.32]	N/A	N/A	N/A	.819 [20.80]	N/A	N/A	N/A
30	.600 [15.24]	N/A	. 600 [15. 24]	N/A	. 619 [15. 72]	N/A	.619 [15.72]	N/A

PROPRIETARY NOTE	
THIS DOCUMENT CONTAINS INFORMATION	
CONFIDENTIAL AND PROPRIETARY TO	
SAMTEC, INC. AND SHALL NOT BE REPRODUCED	
OR TRANSFERRED TO OTHER DOCUMENTS OR	
DISCLOSED TO OTHERS OR USED FOR ANY	
PURPOSE OTHER THAN THAT WHICH IT WAS	
OBTAINED WITHOUT THE EXPRESSED WRITTEN	
CONSENT OF SAMTEC, INC.	
	DESCRIPTI
DO NOT SCALE DRAWING	.025[0

SHEET SCALE: 3:1




c:\enterprisevault\DWG\MISC\MKTG\TSW-XXX-XX-XXX-XXX-MKT.SLDDRW

## **REVISION DK**


	TABLE 7 (-T PLATING ONLY)								
		OF BAND D IN POS			NUMBER OF BAND MARKS ALLOWED IN POST AREA				
LEAD STYLE	PIN #1	PIN #2	PIN #3	LEAD STYLE	PIN #1	PIN #2	PIN #3		
*-05	*()	N/A	N/A	*-17	2	N/A	N/A		
-06	1	N/A	N/A	*-18	2	N/A	N/A		
-07	1	N/A	N/A	*-19	2	N/A	N/A		
-08	0	0	0	*-20	2	N/A	N/A		
-08 RA	0	0	0	*-21	2	N/A	N/A		
-09	0	0	0	-21-RA	0	N/A	N/A		
-09 RA	0	0	0	-21-RE	0	N/A	N/A		
-09-RE	0	0	0	-22	0	0	0		
-10	0	0	0	-22-RA	0	0	0		
-10-RA	0	0	0	-22-RE	0	0	0		
-10-RE	0	0	0	-23	1	N/A	N/A		
-11	0	0	0	-24	1	N/A	N/A		
-11-RA	0	0	0	-25	1	1	1		
-11-RE	0	0	0	*-25-RA	1	0	0		
-12	0	0	0	*-26	1	N/A	N/A		
-12-RA	0	0	0	*-27	0	N/A	N/A		
-12-RE	0	0	0	*-27-RA	0	N/A	N/A		
-13	0	0	N/A	*-27-RE	0	N/A	N/A		
-13-RA	0	0	N/A	*-28	0	0	N/A		
-13-RE	0	0	N/A	*-28-RA	0	0	N/A		
-14	1	N/A	N/A	*-28-RE	0	0	N/A		
*-15	2	N/A	N/A	*-29	1	N/A	N/A		
*-16	1	1	1	*-29-RA	1	N/A	N/A		
*-16-RA	1	1	1	*-30	1	1	N/A		
*-16-RE	1	1	1	*-30-RA	1	1	N/A		
* DING TO DE ELIDDED ODDOCITE OF CELECTIVE DIATING DECODE DEING INCEDTEL									

▹ PINS TO BE FLIPPED OPPOSITE OF SELECTIVE PLATING BEFORE BEING INSERTEI



IN PROCESS 1 (SAME AS FIG. 1, DIFFERENT AS SHOWN) -T PLATING ONLY (SEE NOTE 11) (SEE TABLE 7)

TA	BLE 4
PIN STYLE	"L" REF
T-1S6-07-XXX-2	0.430 [10.92]
T-1S6-08-XXX-2	0.530 [13.46]
T-1S6-09-XXX-2	0.730 [18.54]
T-1S6-10-XXX-2	0.830 [21.08]
T-1S6-11-XXX-2	0.930 [23.62]
T-1S6-12-XXX-2	1.030 [26.16]
T-1S6-13-XXX-2	1.230 [31.24]
T-1S6-14-XXX-2	1.430 [36.32]
T-1S6-15-XXX-2	0.630 [16.00]
T-1S6-16-XXX-2	0.445 [11.30]
T-1S6-17-XXX-2	0.480 [12.19]
T-1S6-18-XXX-2	0.300 [7.62]
T-1S6-19-XXX-2	1.330 [33.78]
T-1S6-20-XXX-2	1.130 [28.70]
T-1S6-21-XXX-2	0.335 [8.51]
T-1RS7-01-XXX-2	0.456 [11.58]

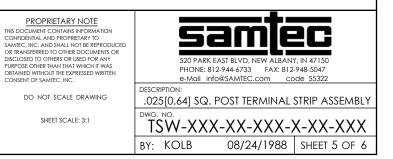

**REVISION DK** 

TABLE 1								
TERMINAL SPECIFICATIONS								
TERMINAL SPEC	PIN #1	PIN #2	PIN #3	"C"				
-05 (3)	T-1S6-21-XXX-2	N/A	N/A	0.105 [2.67]	(5)			
-06 (3)	T-1S6-18-XXX-2	N/A	N/A	0.105 [2.67]	(5)			
-07 (3)	T-1S6-07-XXX-2	N/A	N/A	0.230 [5.84]	(5)			
-08 (4)	T-1S6-08-XXX-2	T-1S6-09-XXX-2	T-1S6-11-XXX-2	(7)0.230 [5.84]	(5)(6)			
-09	T-1S6-09-XXX-2	T-1S6-11-XXX-2	T-1S6-20-XXX-2	0.230 [5.84]	(6)			
-10	T-1S6-10-XXX-2	T-1S6-12-XXX-2	T-1S6-13-XXX-2	0.230 [5.84]				
-11	T-1S6-11-XXX-2	T-1S6-20-XXX-2	T-1S6-19-XXX-2	0.230 [5.84]				
-12	T-1S6-12-XXX-2	T-1S6-13-XXX-2	T-1S6-14-XXX-2	0.230 [5.84]				
-13	T-1S6-13-XXX-2	T-1S6-14-XXX-2	N/A	0.230 [5.84]				
-14(3)	T-1S6-08-XXX-2	N/A	N/A	0.320 [8.13]	(5)			
-15 (3)	T-1S6-09-XXX-2	N/A	N/A	0.520 [13.21]	(5)			
-16	T-1S6-09-XXX-2	T-1S6-11-XXX-2	T-1S6-20-XXX-2	0.320 [8.13]	(5)(6)			
-17 (3)	T-1S6-10-XXX-2	N/A	N/A	0.620 [15.75]	(5)			
-18 (3)	T-1S6-11-XXX-2	N/A	N/A	0.720 [18.29]	(5)			
-19 (3)	T-1S6-12-XXX-2	N/A	N/A	0.820 [20.83]	(5)			
-20 (3)	T-1S6-13-XXX-2	N/A	N/A	1.020 [25.91]	(5)			
-21 (8)	T-1S6-14-XXX-2	N/A	N/A	1.220 [30.99]	(5)			
-21 (1)	T-1S6-14-XXX-2	N/A	N/A	0.230 [5.84]	(5)			
-22	T-1S6-15-XXX-2	T-1S6-10-XXX-2	T-1S6-12-XXX-2	0.230 [5.84]	(5)(6)			
-23 (3)	T-1S6-16-XXX-2	N/A	N/A	0.230 [5.84]	(5)			
-24 (3)	T-1S6-17-XXX-2	N/A	N/A	0.265 [6.73]	(5)			
-25 (4)	T-1S6-15-XXX-2	T-1S6-10-XXX-2	T-1S6-12-XXX-2	0.320 [8.13]	(5)(6)			
*-26 (3)	T-1RS7-01-XXX-2	N/A	N/A	0.230 [5.84]				
-27	T-1S6-19-XXX-2	N/A	N/A	0.230 [5.84]				
-28	T-1S6-20-XXX-2	T-1S6-19-XXX-2	N/A	0.230 [5.84]				
-29(4)	T-1S6-19-XXX-2	N/A	N/A	0.320 [8.13]				
-30 (4)	T-1S6-20-XXX-2	T-1S6-19-XXX-2	N/A	0.320 [8.13]				




FIG 6 (-26 LEAD STYLE) (SAME AS FIG. 1, DIFFERENT AS SHOWN)

(1) .230[5.84] POST FOR -RA OR -RE OPTION (2) OMIT WITH -Q ROW SPECIFICATION (SEE FIG. 6)

(5) AVAILABLE IN -LL OPTION 

 (1) 230[3.3]
 (3) NOT AVAILABLE IN -RA OR -RE OPTION
 (6) AVAILABLE IN -LA OPTION
 .005[0.13]

 (3) NOT AVAILABLE IN -RA OR -RE OPTION
 (7) ON STYLE -08 -LA, RA: "C" = .230[5.84]±.008[0.20]

 (4) NOT AVAILABLE IN -RE OPTION
 (8) 1.220[30.99] POST FOR STRAIGHT PIN VERSION

 \* SQUARE END OF PIN (T-1RS7-01-XXX-2 SHOULD BE LOCATED AT "C" DIMENSION DURING FILL PROCESS.

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC, AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

