
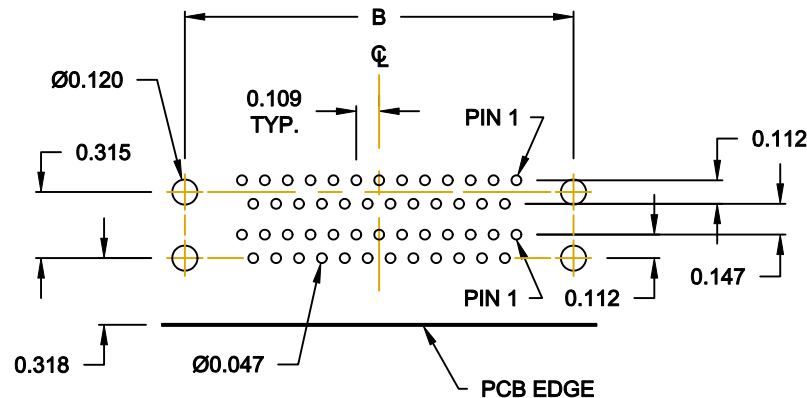
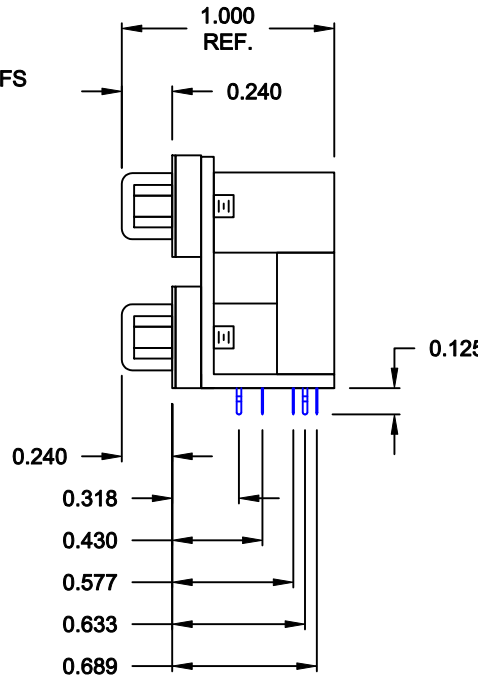


DESCRIPTION: 0.625 CENTER DUAL PORT D-SUB - FEMALE OVER FEMALE

25 PIN  
SHOWN

DIMENSIONS (IN.)				
	9	15	25	37
A	1.204	1.535	2.078	2.724
B	0.984	1.312	1.850	2.500
C	0.494	0.494	0.494	0.494

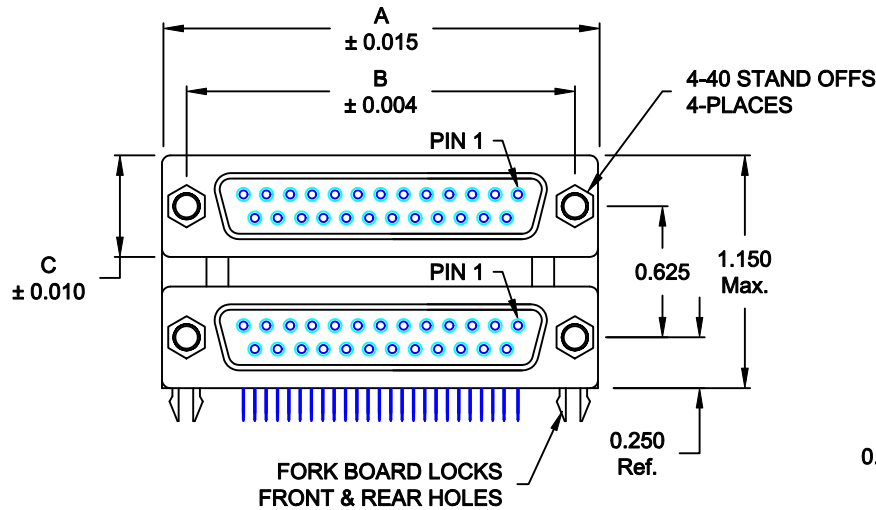

RECOMMENDED PCB LAYOUT

**SPECIFICATION:**

**MATERIAL:**

**SHELL:** STEEL, NICKEL PLATED  
**INSULATOR:** UL 94V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.  
**CONTACTS:** BRASS  
**CONTACT PLATING:** GOLD PLATED ENTIRE CONTACT

**ELECTRICAL:**

**INSULATOR RESISTANCE:** 1,000 Ohms Min.  
**DIELECTRIC STRENGTH:** 1,000VAC RMS  
**CURRENT RATING:** 5 AMPS  
**OPERATING TEMPERATURE:** -55° C TO 105° C

**189-YYY-513R571**

SERIES

POSITIONS

009

015

025

037

GENDER

31 = FEMALE OVER MALE

41 = MALE OVER FEMALE

51 = FEMALE OVER FEMALE

61 = MALE OVER MALE

SHELL PLATING

3 = NICKEL

RoHS COMPLIANT (HIGH TEMP. PROCESS)

HARDWARE OPTIONS

57 = 4-40 STAND OFFS/BOARD LOCKS

PLATING OPTIONS

1 = GOLD FLASH

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

03-30-07

CHECKED:

DATE:

SCALE:

1:1

SHEET

OF

REV

1

1

6

DWG NO.

189-YYY-513R571

**NorComp**

RoHS COMPLIANT