


C1005C0G1H680F050BA (TDK item description : C1005C0G1H680FT****)

Applications Commercial Grade

 Feature Tolerance Tight Tolerance

Series C1005 [EIA CC0402]

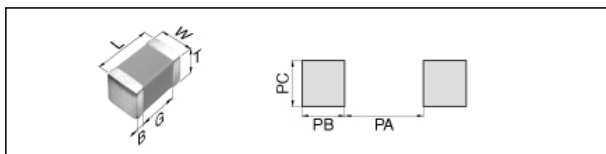

Size	
Length(L)	1.00mm +/-0.05mm
Width(W)	0.50mm +/-0.05mm
Thickness(T)	0.50mm +/-0.05mm
Terminal Width(B)	0.10mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern(PA)	0.30 to 0.50mm
Recommended Land Pattern(PB)	0.35 to 0.45mm
Recommended Land Pattern(PC)	0.40 to 0.60mm
Recommended Slit Pattern(SD)	

Electrical Characteristics	
Capacitance	68pF +/-1%
Rated Voltage	50Vdc
Temperature Characteristic	C0G(0+/-30ppm/degC)
Q	1000 Min.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	10000 Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

C1005C0G1H680F050BA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)



C1005C0G1H680F050BA

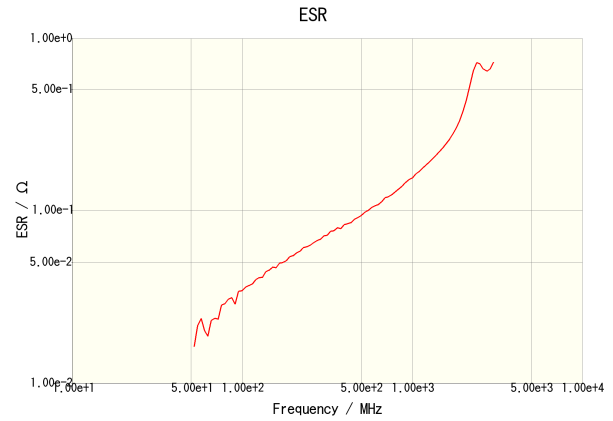


C1005C0G1H680F050BA

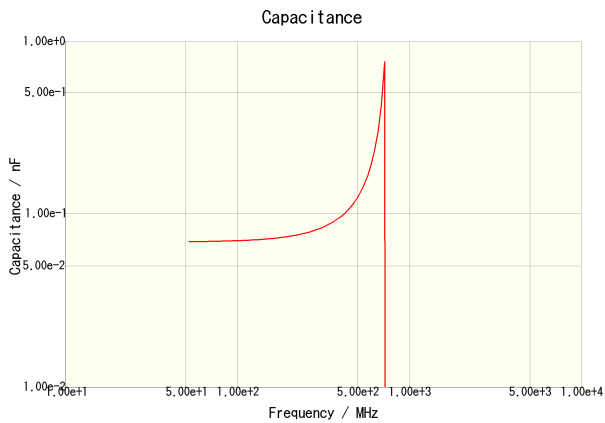


C1005C0G1H680F050BA



C1005C0G1H680F050BA

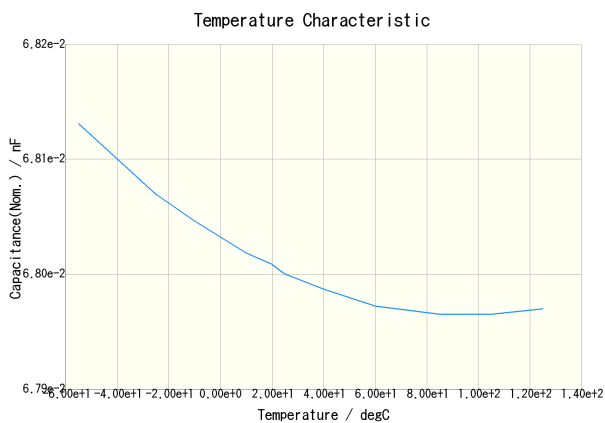

C1005C0G1H680F050BA(DC Bias = 0V) C1005C0G1H680F050BA(DC Bias = 25V)

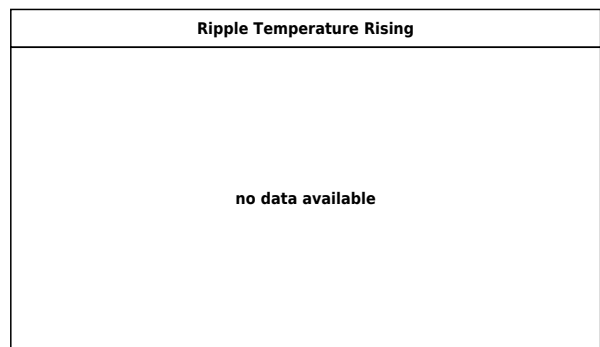

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.