


## Part # SMTSO-440-4ET, ReelFast® Surface Mount Nuts and Spacers/Standoffs - Type SMTSO - Unified

Type SMTSO - ReelFast® surface mount nuts and standoffs are available threaded and unthreaded.

Packaged on 13" recyclable reels. Tape width is 24mm. Supplied with polyamide patch for vacuum pick up. Reels conform to EIA-481.

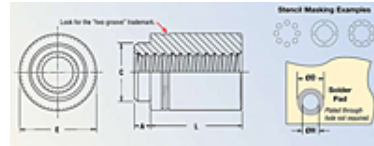

## SPECIFICATIONS

Thread Size	.112-40 (#4-40)
Thread Code	440
Length Code	4
L - Length ± .005	.125 in
Min. Sheet Thickness	.060 in
A Max.	.060 in
C Max.	.161 in
E ± .005	.219 in
øH - Hole Size in Sheet + .003 - .000	.166 in
øD - Min. Solder Pad	.244 in
Parts per Reel	1000
Pitch	12 mm
For Use in Sheet Hardness <sup>1</sup>	Not Applicable

Thread Specification	Internal, ASME B1.1, 2B
Fastener Material	Carbon Steel
Standard Finish	Electro-Plated Bright Tin, ASTM B545, Class A with Clear Preservative Coating
CAD Supplier	PennEngineering® (PEM®)

1 HRB - Hardness Rockwell "B" Scale. HB - Hardness Brinell.