


May.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

25-07670

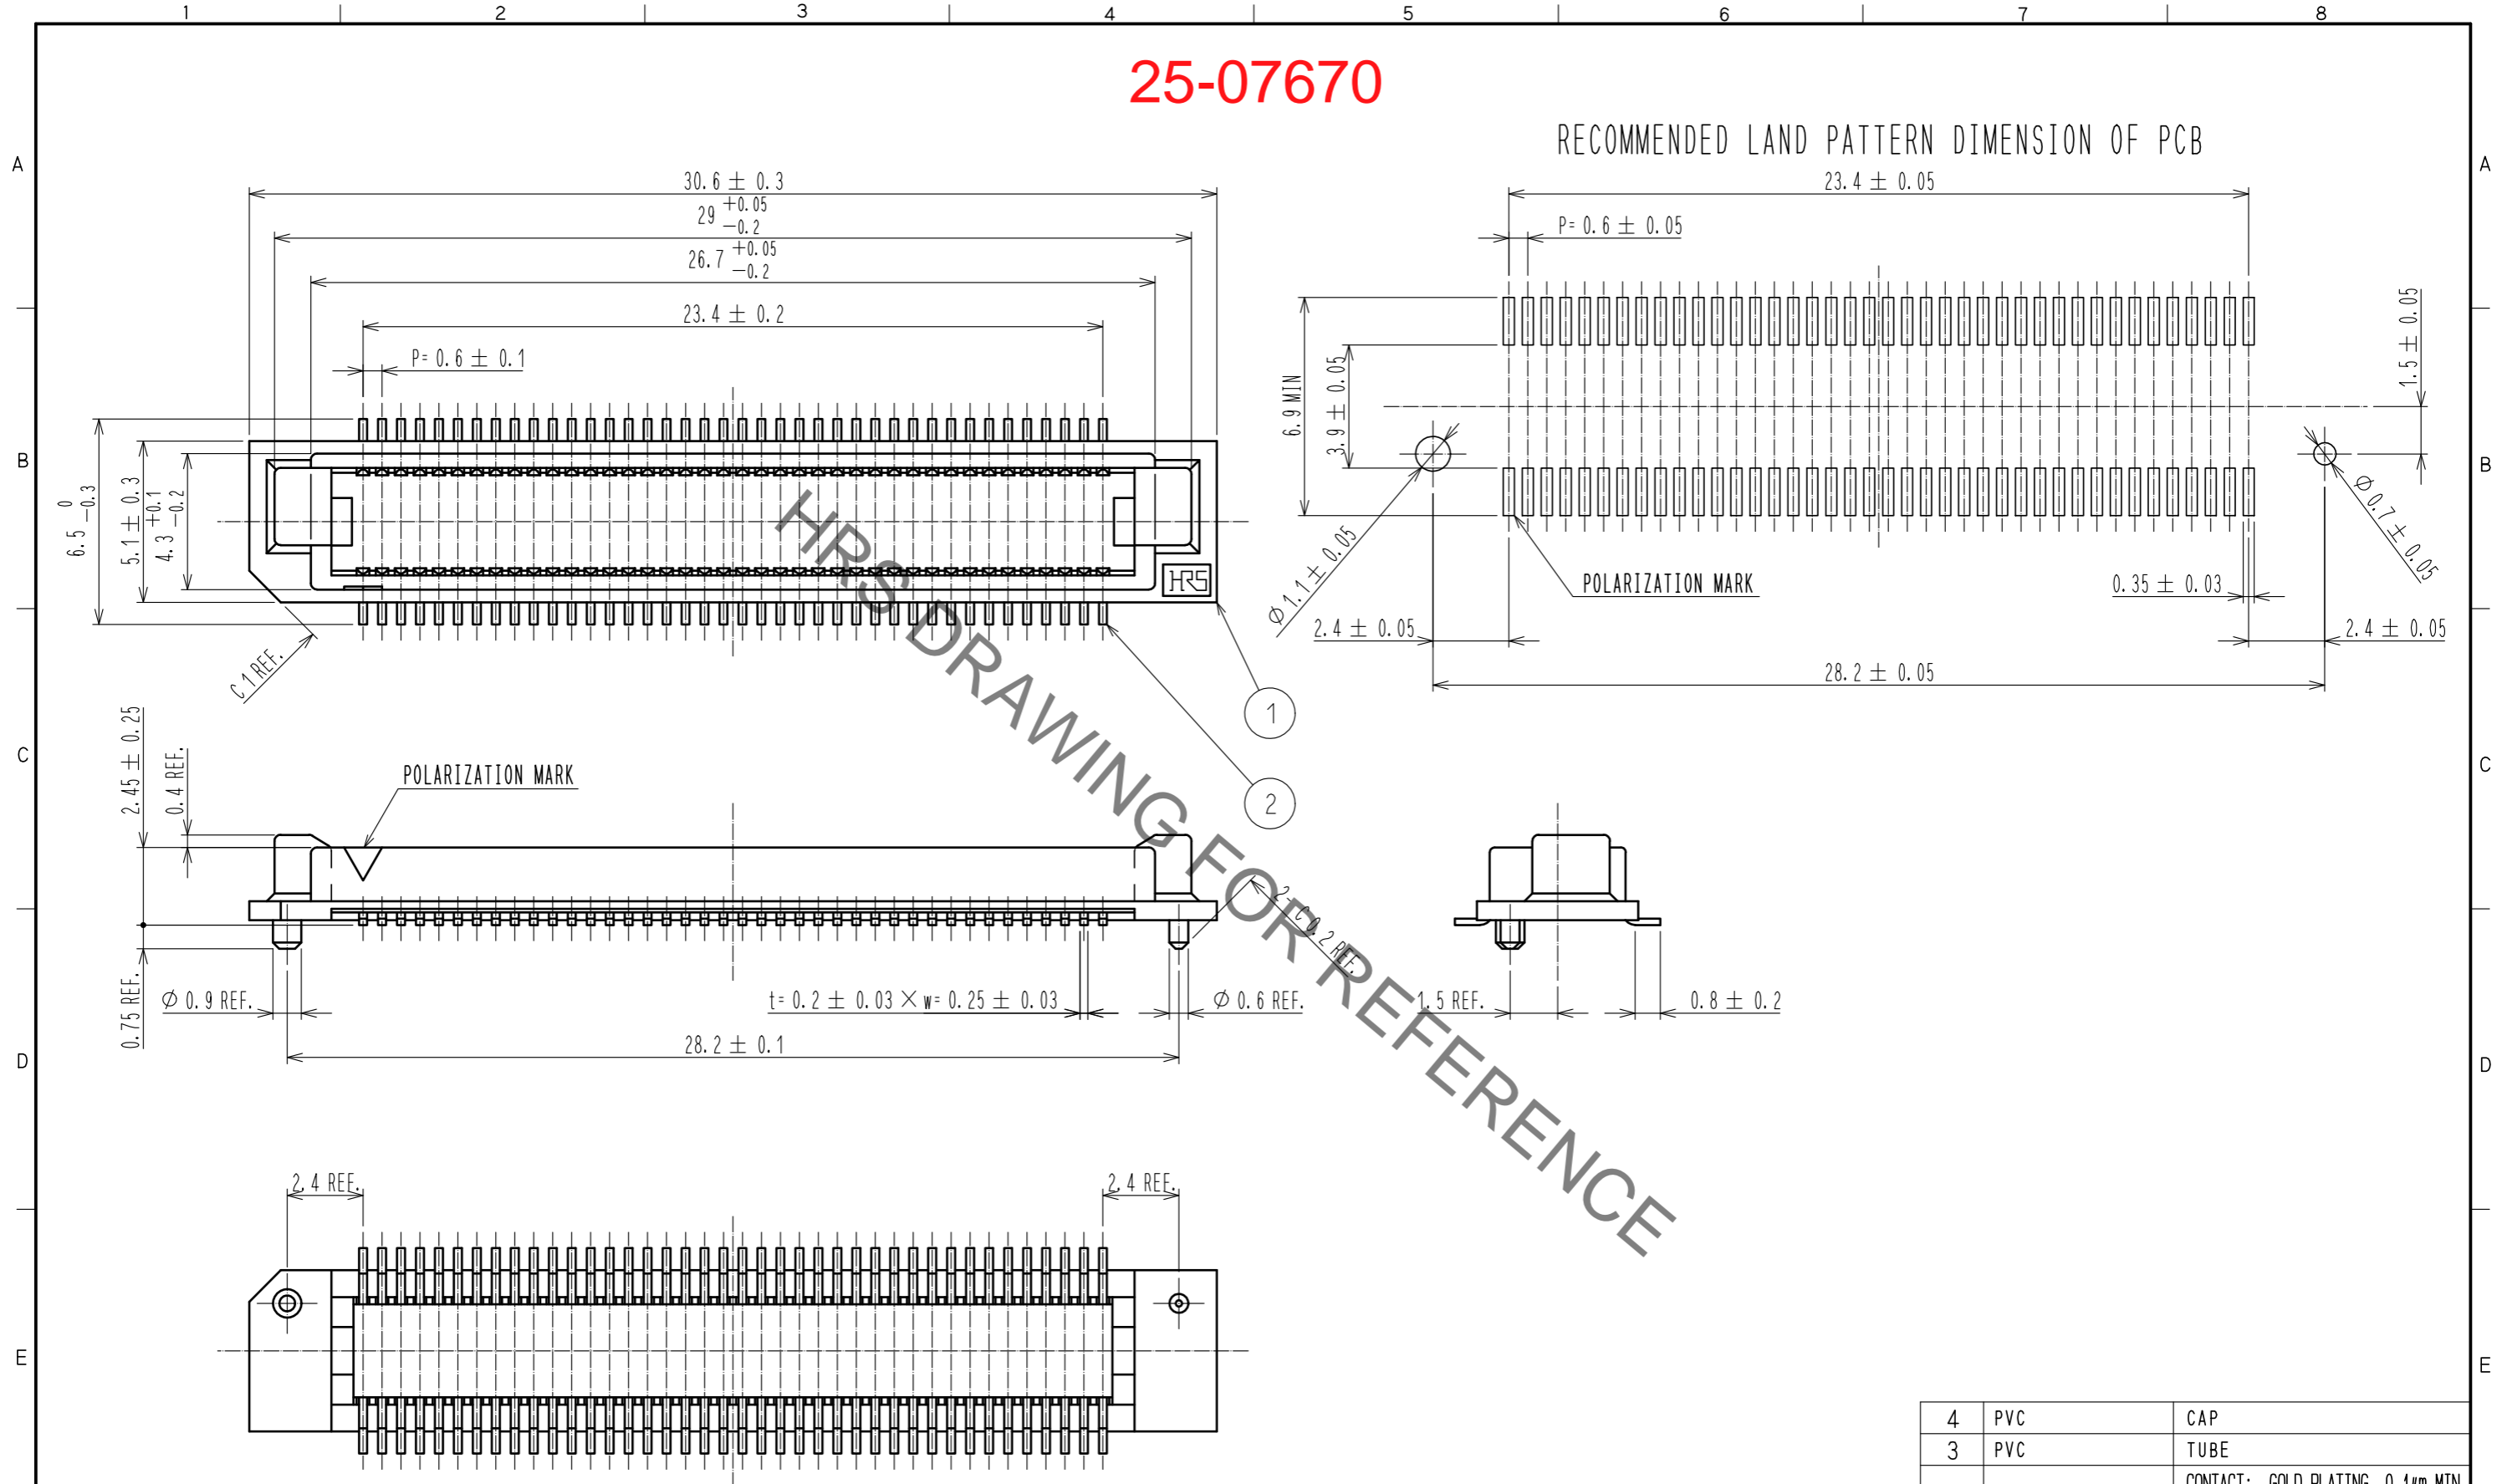


- NOTE**
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - TUBE PACKAGE IS APPLIED FOR THIS PRODUCT. PLEASE REFER TO THE SHEET 2/2 FOR THE DETAILS.
 - FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

1	PPS	LIGHT BROWN, UL94V-0	4	PVC	CAP
2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 0.1μm MIN LEAD : GOLD PLATING 0.03μm MIN UNDER : NICKEL PLATING 0.5μm MIN	3	PVC	TUBE
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5:1	COUNT	DESCRIPTION OF REVISIONS	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA 16.11.21	DESIGNED	EDC-150736-91-00	
		CHECKED : HT. YAMAGUCHI 16.11.21	CHECKED	PART NO. FX8-80P-SV(91)	
		DESIGNED : MT. ITANO 16.11.21	DATE	CODE NO. CL578-0003-1-91	
		DRAWN : MT. ITANO 16.11.21		1/2	

May.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(FREE)

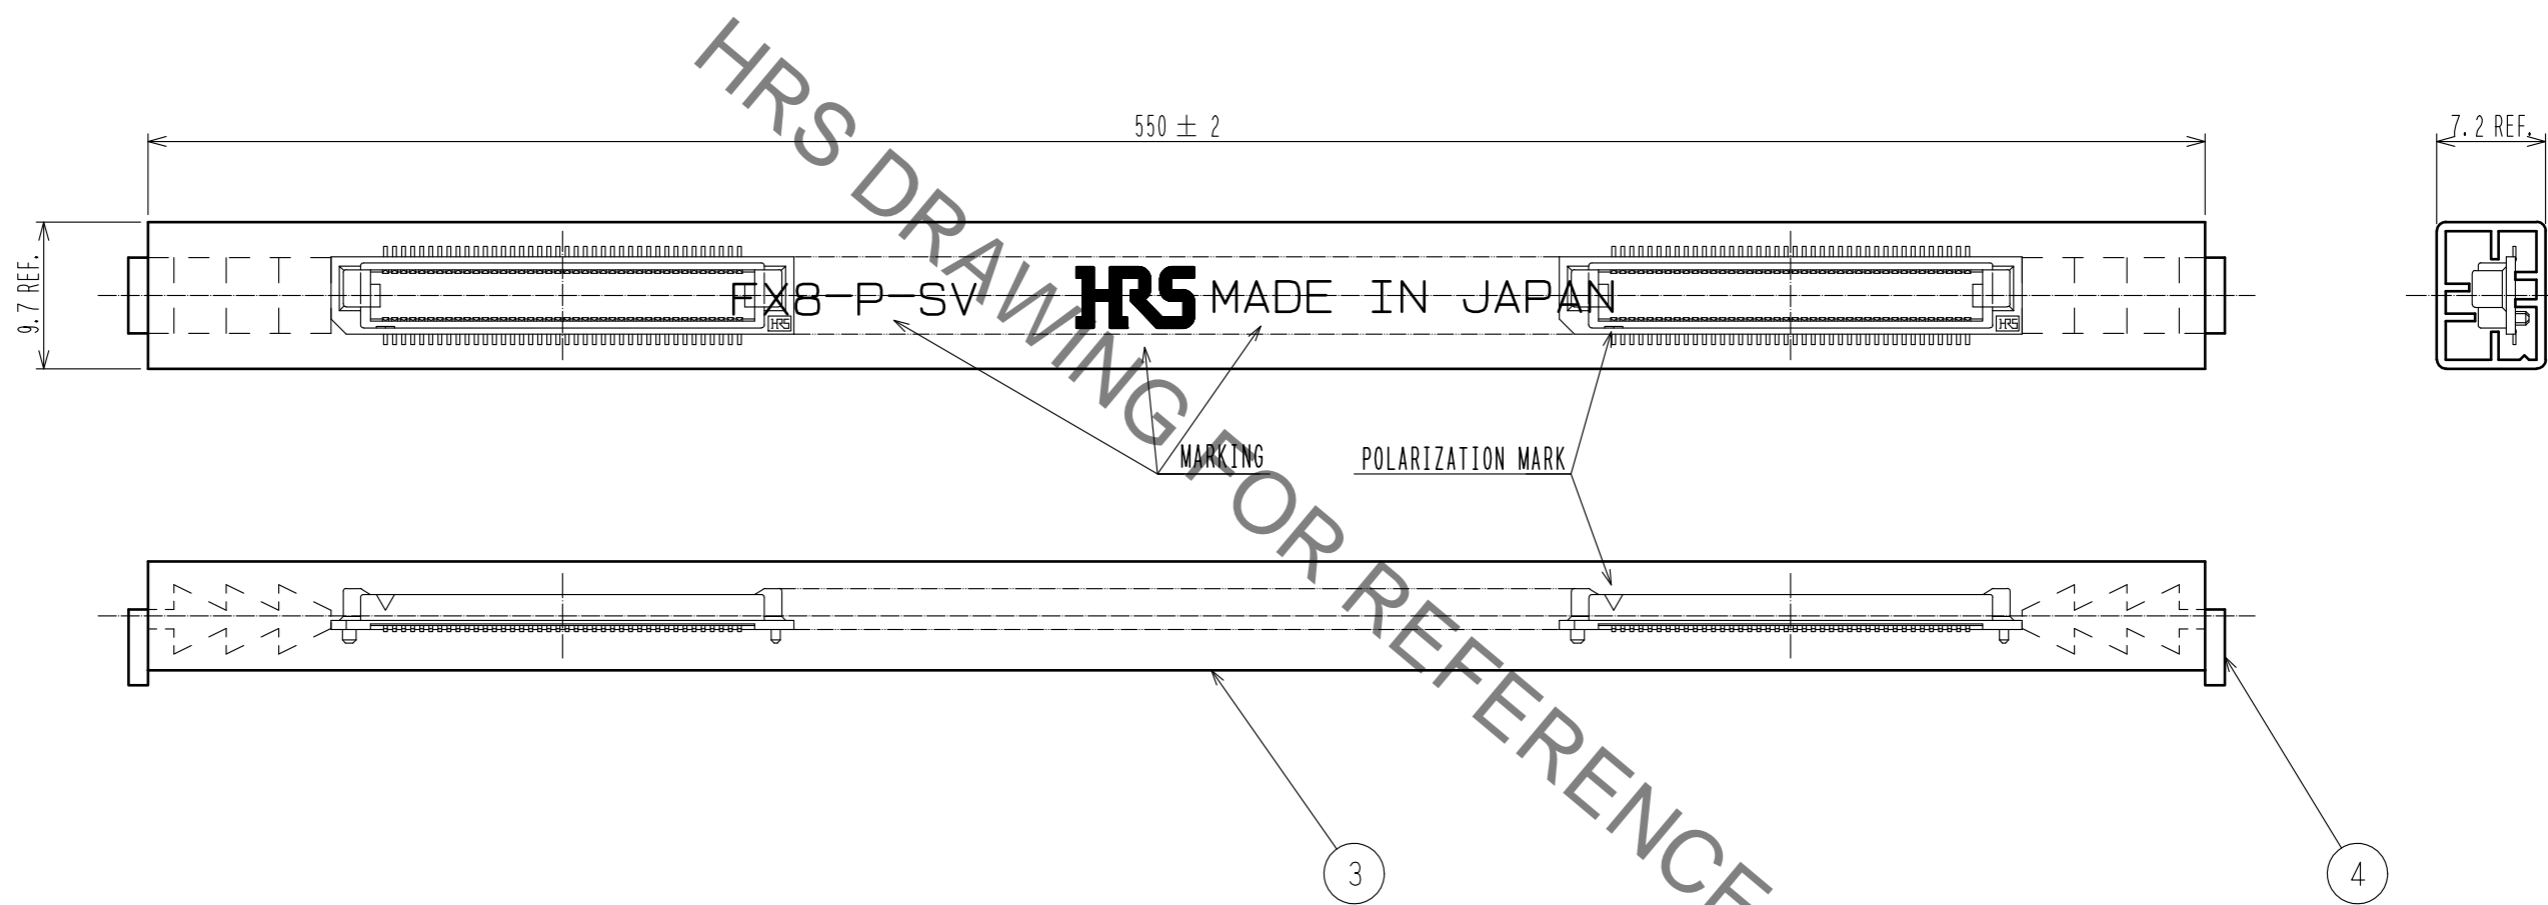

NOTE 4. 1TUBE : 17CONNECTORS.

HRS	DRAWING NO.	EDC-150736-91-00
	PART NO.	FX8-80P-SV(91)
	CODE NO.	CL578-0003-1-91

△ 2/2