NOTES: REVISION DT 25-07749, 25-07750 ANY CHANGES MADE TO THIS PRINT MUST ALSO BE MADE TO THE SFC PRINT 1. © REPRESENTS A CRITICAL DIMENSION. 2. MINIMUM PUSHOUT FORCE: .5 LB. SFM-1XX-XX-XXX-D-XXX (C) 3. COPLANARITY: .004[0.10] = POS 05 THRU 26 .006[0.15] = POS 27 THRU 50 4. TUBE ALL POSITIONS. PARTS TO BE TUBED WITH DO NOT **SCALE FROM** No OF POSITIONS THIS PRINT NOTCH GOING WITH ARROW. (LEAVE BLANK FOR STANDARD ALL POSITIONS AVAILABLE 5. PINS CAN BE ORIENTED IN ANY DIRECTION; -02 THRU -50 AND USE SFM-XX-D) -N: NO POLARIZATION NOTCH BOTH ROWS MUST FACE SAME WAY. (USE BODY: SFM-XX-D-XX-X) 6. SEE NOTCH FOR PROPER ORIENTATION (USE SFM-XX-D-XX-N) 7. MAXIMUM PIN HEIGHT VARIATION: .003[0.08] FROM PIN TO PIN AND ROW TO ROW, MUST BE MEASURED BETWEEN ADJACENT PINS. -A: ALIGNMENT PIN (USÉ SFM-XX-D-A-X) (SEE FIG 4, SHT 2) -LC: LOCKING CLIP (SEE FIG 6, SHT 3 & NOTE 8) (AVAILABLE ON ALL LEADS) **LEAD STYLE** -01: THROUGH HOLE 8. DUE TO HIGH AMOUNT OF INSERTION FORCE (USE CONTACT: C-44-01-XXX) (SEE FIG 1, SHT 1) NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL -P: PICK AND PLACE PAD (SEE FIG 5, SHT 2) -02: SURFACE MOUNT AVAILABLE ON 5 THRU 50 POSITION ONLY) PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION. USE CONTACT: C-44-02-XXX) -TR: TAPE & REEL (SEE SHT 4) (NOT AVAILABLE WITH -DS OPTION) 9. DIMENSION TO BE MEASURED AT BEND. SEE FIG 2, SHT 2) -03: STRAIGHT MODIFIED -K: POLYIMIDE FILM PAD (.005[0.13] THICKNESS) (SEE FIG 3, SHT 2) (USE K-DOT-.157-.250-.005) -SN: SOLDER NAIL FOR .062 BOARD *DIMENSIONS N/A FOR -N OPTION (USE CONTACT: C-44-03-XXX) SEE FIG 1, SHT 1) -L1: THROUGH HOLE (LOW INSERTION) (USE CONTACT: C-61-01-XXX) *.145[3.68] REF (SFM-XX-D-SN AND WT-27-01-T) (AVAILABLE WITH LEAD STYLE -02, -L2 & -T2) SEE FIG 1, SHT 1) (NOT AVAILABLE WITH -A & -LC) -SN2: SOLDER NAIL FOR .093 BOARD *.020 [0.51] REF -L2: SURFACE MOUNT (LOW INSERTION) (USE CONTACT: C-61-02-XXX) (SFM-XX-D-SN AND WT-27-02-T) (AVAILABLE WITH LEAD STYLE -02, -L2 & -T2) 120 [3.05] REF *.080[2.03] REF (SEE FIG 2, SHT 2) -L3: STRAIGHT MODIFIED (LOW INSERTION) (USE CONTACT: C-61-03-XXX) .050 [1.27] (NOT AVAILABLE WITH -A & -LC) -DS: DUAL SCREW DOWN FOR .062 BOARD 02 REF SEE FIG 1, SHT 1) (SEE FIG 8, SHT 3) opopokápopo -T1: THROUGH HOLE (PHOS BRONZE) ONLY AVAILABLE WITH -01, -02 AND -03 LEAD Ģ (USE CONTACT: C-119-01-XXX) STYLE) (NOT AVAILABLE WITH OPTIONS -N. -A. SEE FIG 1, SHT 1) -LC, -P, -TR, -K, -SN AND SN2), (USES SFM-XX-D-DS, -T2: SURFACE MOUNT (PHOS BRONZE) (USE CONTACT: C-119-02-XXX) CPS-RR-XX-XX-X, ACCRT-01 AND WT-27-XX-T 01 ALWAYS FILLED) Ģ (SEE FIG 2, SHT 2) .050 [1.27] REF **BODY SPECIFICATION** -D: DOUBLE ROW (No OF POS x .050[1.27]) + .015[0.38] REF PLATING SPECIFICATION -S: 30µ" SELECTIVE GOLD IN CONTACT AREA, q MÄTTE TIN ON TAIL ·SFM-XX-D-LC-X No OF POS x .050[1.27]) + .155[3.94] REF -F: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL C-XX-01-XXX -H: 30µ" HEAVY GOLD IN CONTACT AREA, (SEE NOTE 5) 3µ" GOLD ON TAIL -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, 180 [4.57] REF MATTE TIN ON TAIL .015[0.38] REF .110[2.79] REF -STL: 30u" SELECTIVE GOLD IN CONTACT AREA. TIN/LEAD (90/10+/-5%) TAIL $\langle \mathbb{C} \rangle$ (ONLY AVAILABLE ON -02 OR -L2 LEADSTYLES) -SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, (SEE TABLE 1) MATTE TIN ON TAIL 2° MAX SWAY (EITHER DIRECTION) -FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL .050 [1.27] (C) -LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA MÄTTE TIN ON TAIL .005[0.13] REF (NO OF POS x .050[1.27]) - .050[1.27] REF MAX SWAY SECTION "A"-"A" (EITHER DIRECTION) PROPRIETARY NOTE FIG 1 UNLESS OTHERWISE SPECIFIED. THIS DOCUMENT CONTAINS CONFIDENTIAL AND DIMENSIONS ARE IN INCHES. THROUGH HOLE/STRAIGHT MODIFIED PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS TOLERANCES ARE: AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE DECIMALS **ANGLES** OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY .XX: ±.01 [0.3] .XXX: ±.005 [0.13] 2° 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC. .XXXX: ±.0020 [0.051] e-Mail info@SAMTEC.com TABLE 1 DO NOT SCALE DRAWING SHEET SCALE: 3:1 .050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY INSULATOR: LCP UL 94V-O, COLOR: BLACK SUFFIX|TAIL LENGTH "A" TAIL WIDTH "B" CONTACT: TIGER EYE: BeCu

-X1

-X3

.120[3.05]

.075[1.91]

.020[0.51]

.016[0.41]


TIGER EYE LITE: PHOSPHOR BRONZE


F:\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW


SFM-1XX-XX-XXX-D-XXX


SHEET 1 OF 4


BY: JORDAN 12/11/89

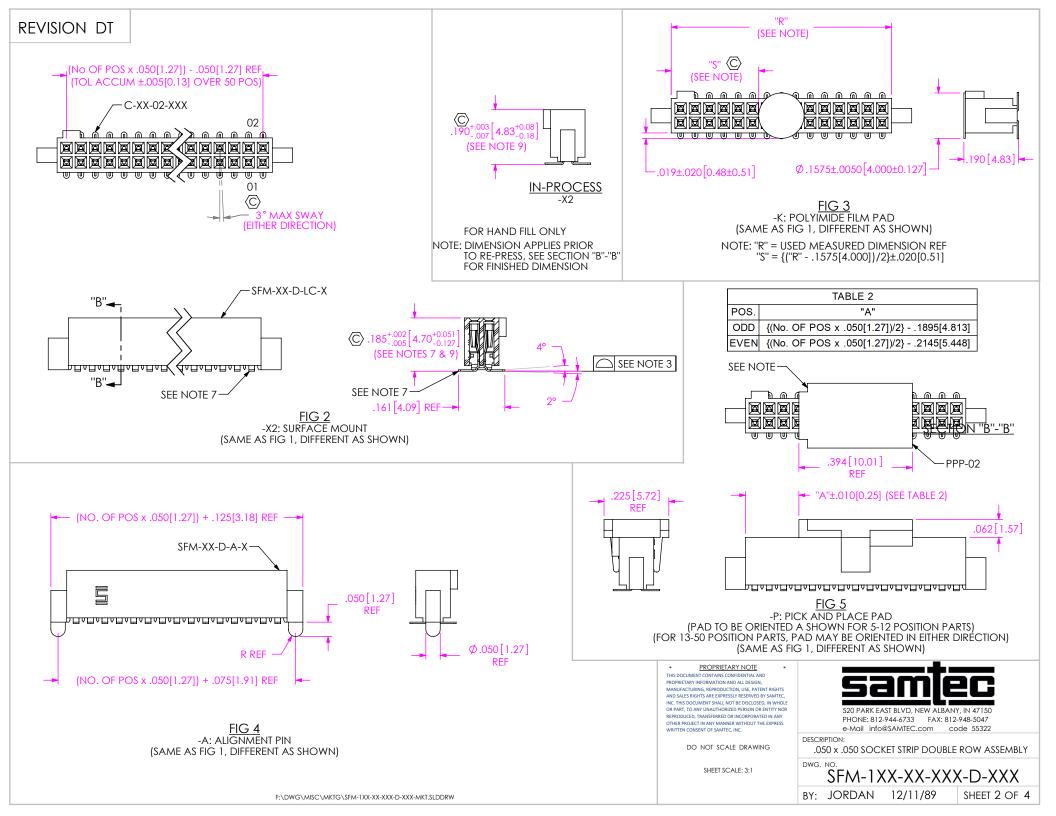


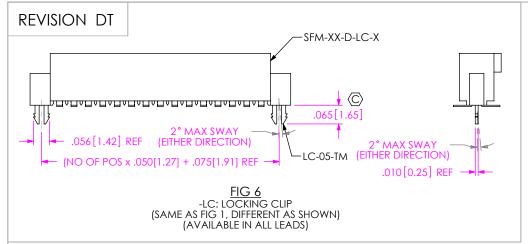


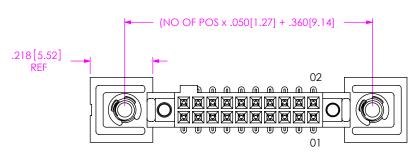




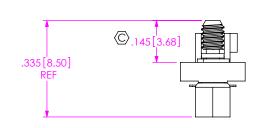

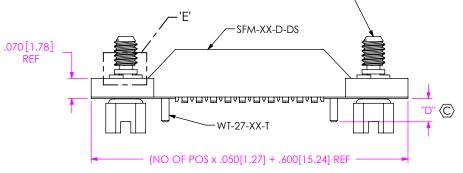

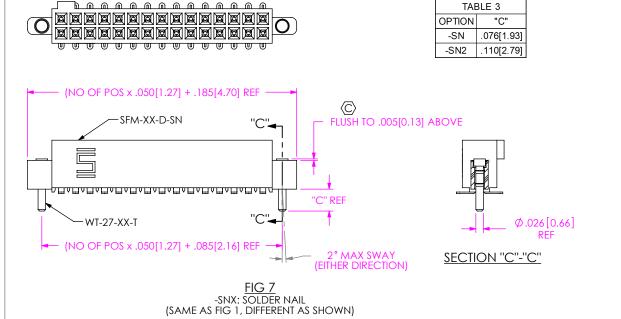

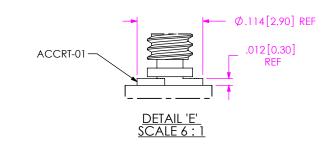

CPS-RR-M2-01-X-

FIG 8 -DS: DUAL SCREW DOWN (SAME AS FIG 2, DIFFERENT AS SHOWN)

* PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND

PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMPLE, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OF PART, TO ANY MUNITHORIZED PERSON DE ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANWER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMPLE, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

DO NOT SCALL DRAWING

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

.050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY

SFM-1XX-XX-XXX-D-XXX

BY: JORDAN 12/11/89 SHEET 3 OF 4

F:\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW

